

# Approval Sheet

## (產品承認書)

|                   |                                                 |
|-------------------|-------------------------------------------------|
| 產品名稱 (Product):   | Bluetooth Low Energy Module                     |
| 解決方案 (Solution):  | Nordic nRF52840                                 |
| 產品型號 (Model No.): | <b>MDBT50Q – U1M</b> <b>V2</b> (u.FL Connector) |
| 產品料號 (Part No.):  | see <a href="#">4.3 Order Code</a>              |


### *Advantage of MDBT50Q-U:*

- 1. Working distance in open space:*
  - 125K bps: over 750 meters
  - 1M bps: over 300 meters
- 2. Declaration ID includes all Nordic applied profiles.*
- 3. Four selected antennas to use directly with certification approval.*  
See [7. Antenna](#)

# Index

|                                                               |           |
|---------------------------------------------------------------|-----------|
| <b>1. Overall Introduction .....</b>                          | <b>4</b>  |
| 1.1. Application .....                                        | 4         |
| 1.2. Features .....                                           | 5         |
| <b>2. Product Dimension .....</b>                             | <b>7</b>  |
| 2.1. PCB Dimensions & Pin Indication.....                     | 7         |
| 2.2. Recommended Layout of Solder Pad .....                   | 8         |
| 2.3. RF Layout Suggestion (aka Keep-Out Area) .....           | 11        |
| 2.4. Footprint & Design Guide .....                           | 12        |
| 2.5. Pin Assignment.....                                      | 13        |
| 2.6. GPIO Located Near the Radio.....                         | 16        |
| <b>3. Main Chip Solution.....</b>                             | <b>16</b> |
| <b>4. Shipment Packaging Information .....</b>                | <b>17</b> |
| 4.1. Marking on Metal Shield .....                            | 18        |
| 4.2. Packaging Info.....                                      | 19        |
| 4.3. Order Code.....                                          | 21        |
| <b>5. Specification .....</b>                                 | <b>22</b> |
| 5.1. Absolute Maximum Ratings .....                           | 22        |
| 5.2. Operating Conditions.....                                | 22        |
| 5.3. Electrical Specifications.....                           | 23        |
| <b>6. Block Diagram .....</b>                                 | <b>29</b> |
| <b>7. Antenna.....</b>                                        | <b>30</b> |
| <b>8. Reference Circuit.....</b>                              | <b>31</b> |
| 8.1. Reg0 DC/DC Enabled.....                                  | 32        |
| 8.2. Reg0 LDO Mode.....                                       | 33        |
| 8.3. Reg0 DC/DC and LDO Mode Disabled.....                    | 34        |
| 8.4. USB Disabled .....                                       | 35        |
| <b>9. Certification .....</b>                                 | <b>36</b> |
| 9.1. Declaration ID .....                                     | 36        |
| 9.2. FCC Certificate (USA) .....                              | 37        |
| 9.3. TELEC Certificate (Japan).....                           | 38        |
| 9.4. NCC Certificate (Taiwan) .....                           | 40        |
| 9.5. CE (EU) & RCM (Australia & New Zealand) Test Report..... | 41        |
| 9.6. IC Certificate (Canada) .....                            | 44        |

|            |                                                |           |
|------------|------------------------------------------------|-----------|
| 9.7.       | SRRC Certificate (China).....                  | 45        |
| 9.8.       | KC Certificate (South Korea) .....             | 46        |
| 9.9.       | WPC (ETA) Certificate (India) .....            | 47        |
| 9.10.      | RoHS & REACH Report .....                      | 47        |
| 9.11.      | End-Product Label.....                         | 48        |
| <b>10.</b> | <b>Notes and Cautions.....</b>                 | <b>50</b> |
| <b>11.</b> | <b>Basic Facts for nRF52 Family .....</b>      | <b>51</b> |
| <b>12.</b> | <b>Useful Links .....</b>                      | <b>52</b> |
|            | <b>Full List of Raytac’s BLE Modules .....</b> | <b>53</b> |
|            | <b>Release Note .....</b>                      | <b>56</b> |

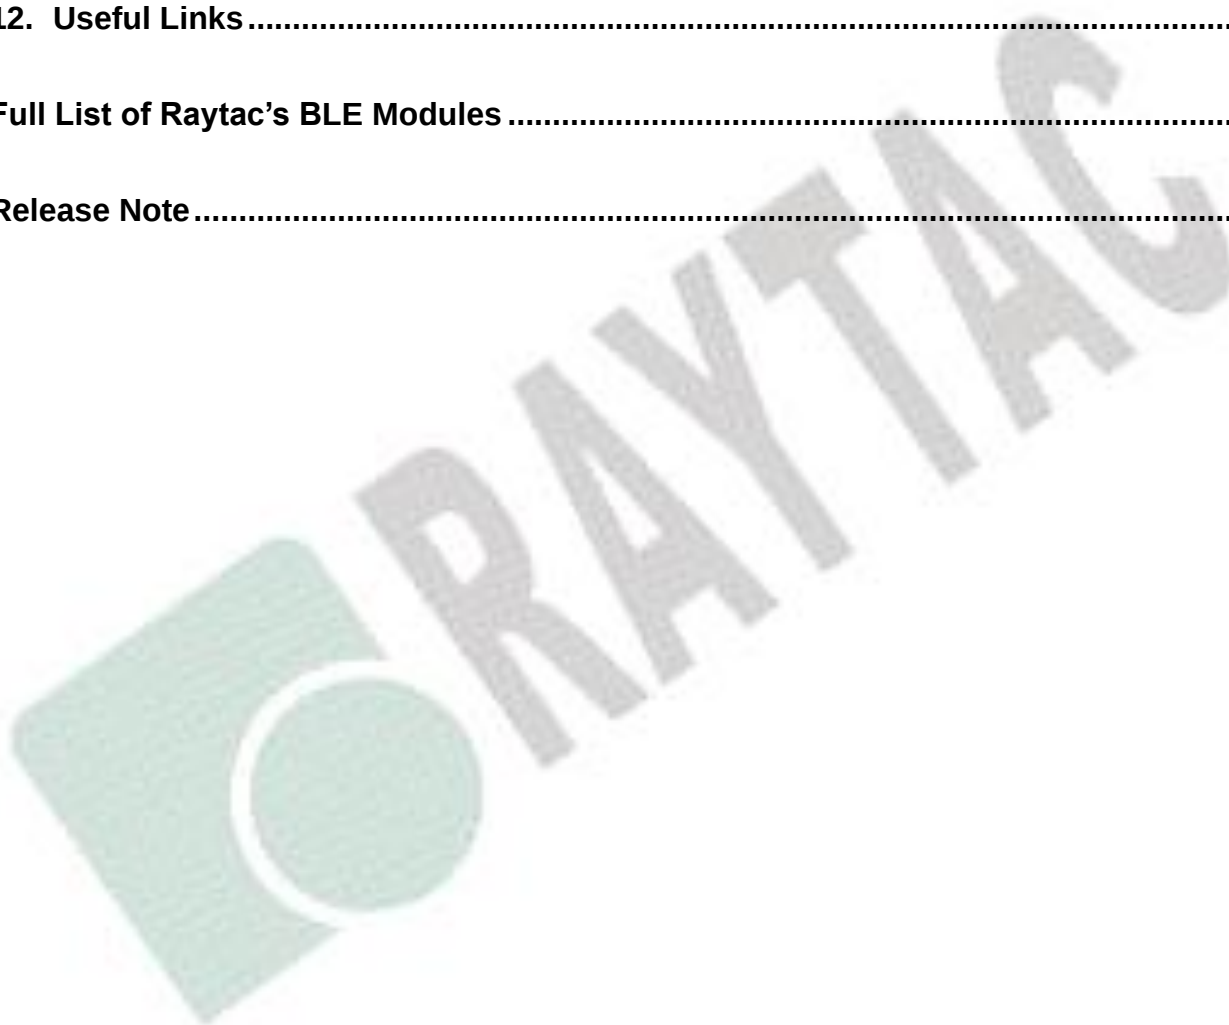

# 1. Overall Introduction

Raytac's MDBT50Q-U is a BT 5.0 stack (Bluetooth low energy or BLE) module designed based on **Nordic nRF52840 SoC solution**, which incorporates: **GPIO, SPI, UART, I2C, I2S, PMD, PWM, ADC, NFC** and **USB** interfaces for connecting peripherals and sensors.

Features:

1. Embedded 2.4GHz transceiver supports Bluetooth 5 (  **Bluetooth**® ), IEEE 802.15.4 (  **THREAD** & Zigbee) & 2.4Ghz RF & ANT+ upon customer's preference.
2. Compact size with **(L) 15.5 x (W) 10.5 x (H) 2.05 mm**.
3. Low power requirements, ultra-low peak, average and idle mode power consumption.
4. Be compatible with a large installed base of mobile phones, tablets and computers.
5. Fully coverage of BLE software stack.
6. BLE & RF transmission switching helps products fit all operation system and most hardware.

## 1.1. Application

- IoT Networks
  - Smart home (such as door locks, lighting) sensors and controllers
  - Smart city sensor networks
  - Industrial IoT sensors and controllers
  - Connected white goods
- Personal Area Networks
  - Health / fitness sensor and monitor device
  - Medical device
- Interactive entertainment devices
  - Advanced remote controls
  - Gaming controller
- Advanced wearables
  - Connected watches
  - Advanced personal fitness devices
  - Wearables with wireless secure payment
  - Connected Health
  - Virtual/Augmented Reality applications
  - High performance HID Controllers
- Mesh Network

## 1.2. Features

- Bluetooth 5, IEEE 802.15.4, 2.4 GHz transceiver
  - -95dBm sensitivity in 1Mbps Bluetooth low energy (BLE) mode
  - -103dBm sensitivity in 125Kbps BLE mode (long range)
  - +8 dBm TX power (down to -20 dBm in 4 dB steps)
  - On-air compatible with nRF52, nRF51, nRF24L and nRF24AP Series
  - Programmable output power from +8dBm to -20dB
  - RSSI (1dB resolution)
  - Supported data rates:
    - Bluetooth 5: 2 Mbps, 1 Mbps, 500 kbps, 125 kbps
    - IEEE 802.15.4-2006: 250 kbps
    - Proprietary 2.4 GHz: 2 Mbps, 1 Mbps
- ARM Cortex –M4 32-bit processor with FPU, 64 MHz
- Memory: 1MB flash / 256KB RAM
- HW accelerated security
  - ARM TrustZone Cryptocell 310 cryptographic accelerator
  - 128 bit AES / ECB / CCM / AAR co-processor (on-the-fly packet encryption)
- Advanced on-chip interfaces
  - USB 2.0 full speed (12Mbps) controller
  - QSPI 32MHz interface
  - High speed 32MHz SPI
  - Type 2 near field communication (NFC-A) tag with wake-on field
  - Programmable peripheral interconnect (PPI)
  - 48 general purpose I/O pins
  - EasyDMA automated data transfer without CPU processing on peripherals
- 12 bit, 200ksps ADC – 8 configurable channels with programmable gain
- 4 x 4 channel pulse width modulator (PWM)units with EasyDMA
- Audio peripherals : I2S, digital microphone interface (PDM)
- 5 X 32-bit timers with counter mode
- Up to 4 x SPI masters / 3 x SPI slaves with EasyDMA
- Up to 2 x I2C compatible 2-wire masters / slaves
- 2 x UART(CTS/RTS) with EasyDMA
- Quadrature decoder (QDEC)
- 3 x 24-bit real-time counters (RTC)


- Flexible power management
  - Supply voltage range 1.7V to 5.5V
  - On-chip DC/DC and LDO regulators with automated low current modes
  - Regulated supply for external components from 1.8V to 3.3V
  - Automated peripheral power management
  - Fast wake-up using 64MHz internal oscillator
  - 0.4uA at 3V in OFF mode, no RAM retention
  - 1.5uA at 3V in ON mode, no RAM retention, wake on RTC
- Nordic SoftDevice ready and with support for concurrent multi-protocol



## 2. Product Dimension

### 2.1. PCB Dimensions & Pin Indication


| PCB Size (in mm) |        |      |       |
|------------------|--------|------|-------|
|                  | Min.   | Norm | MAX.  |
| L                |        | 15.5 |       |
| W                | - 0.15 | 10.5 | + 0.2 |
| H                |        | 2.05 |       |

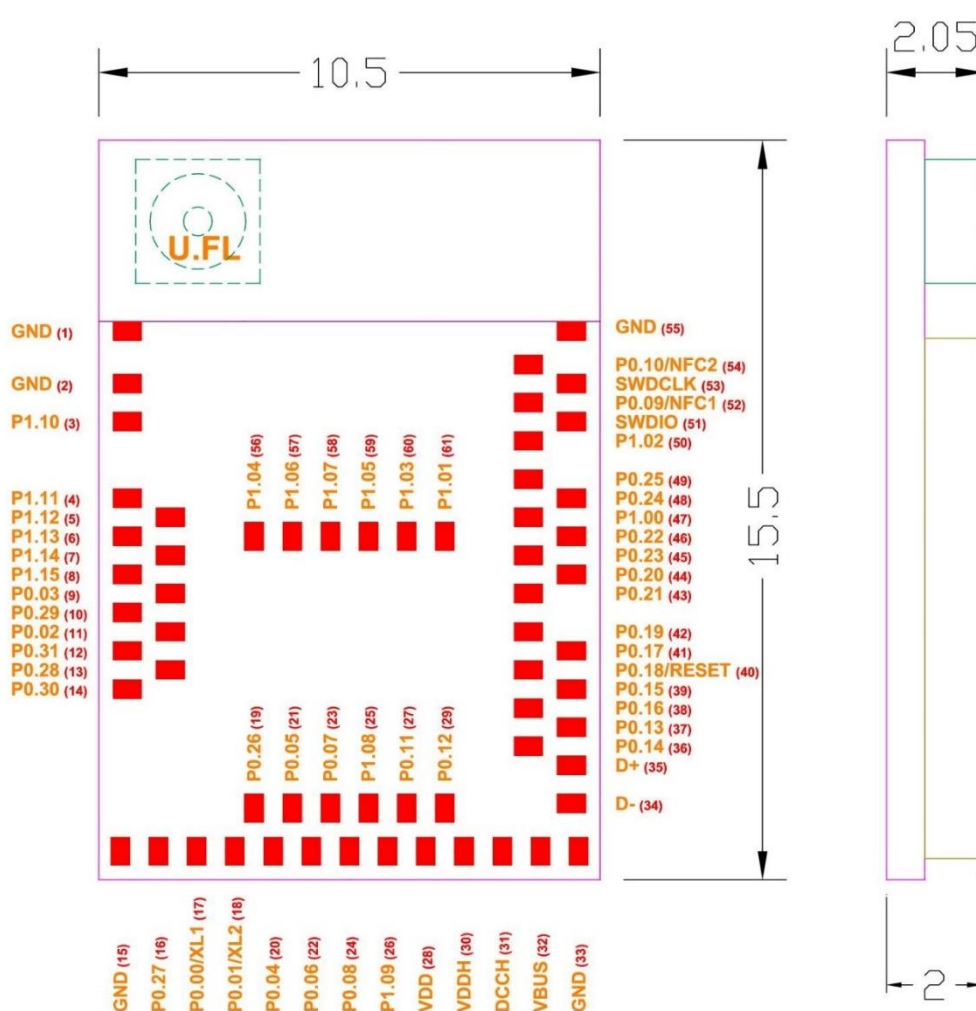



Top 單位:(mm)

## 2.2. Recommended Layout of Solder Pad

*Graphs are all in Top View, Unit in mm.*

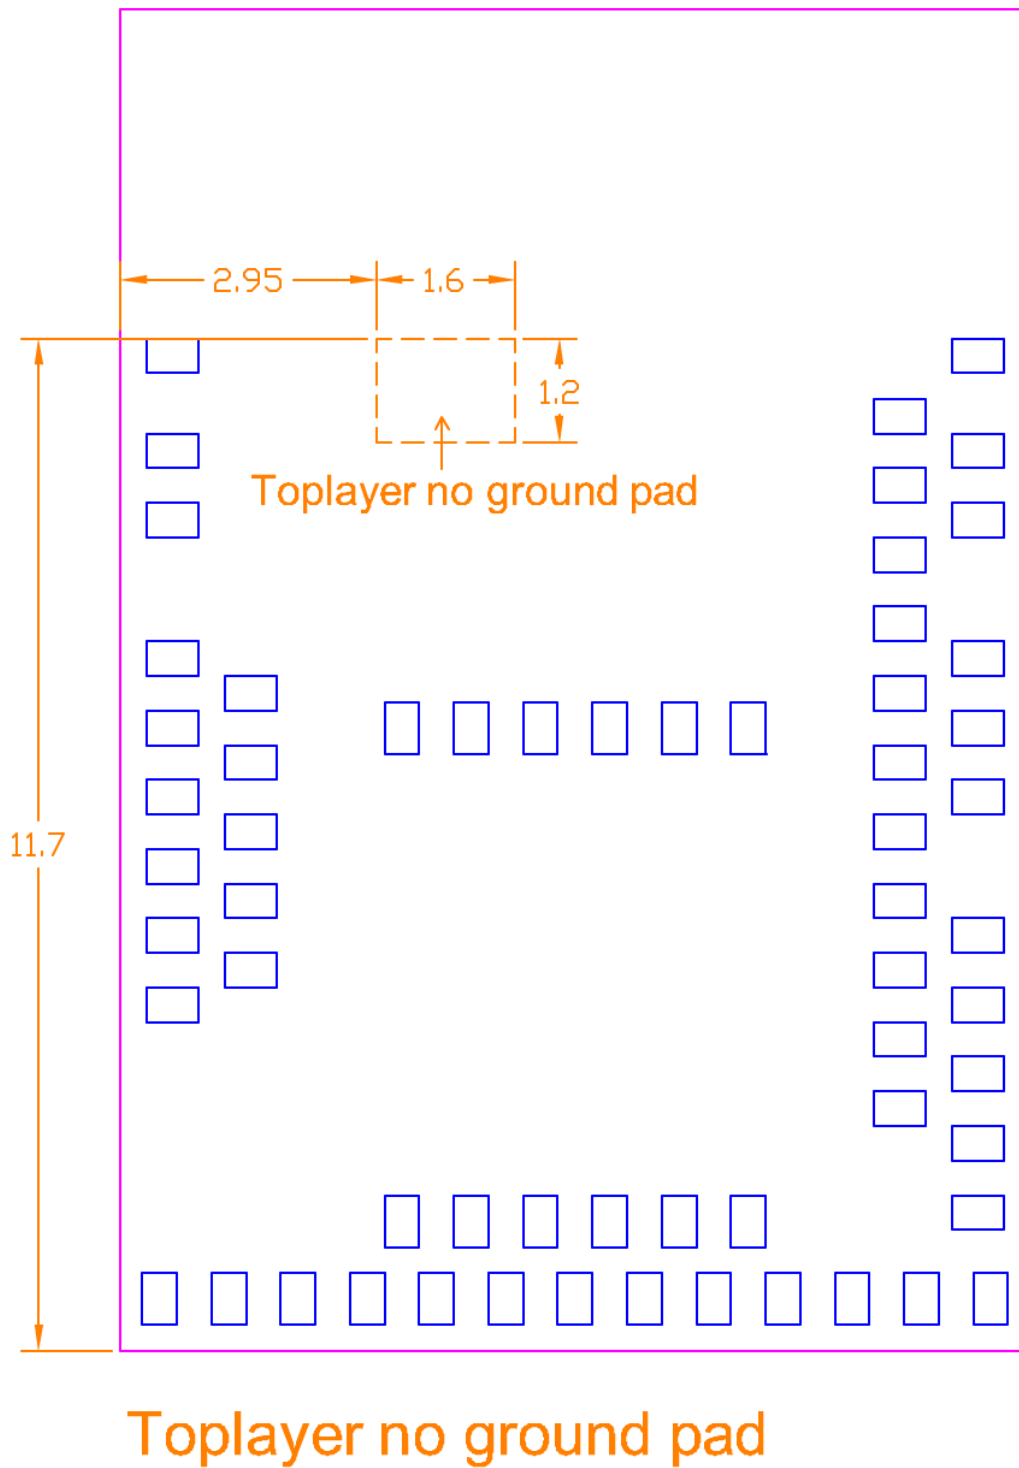

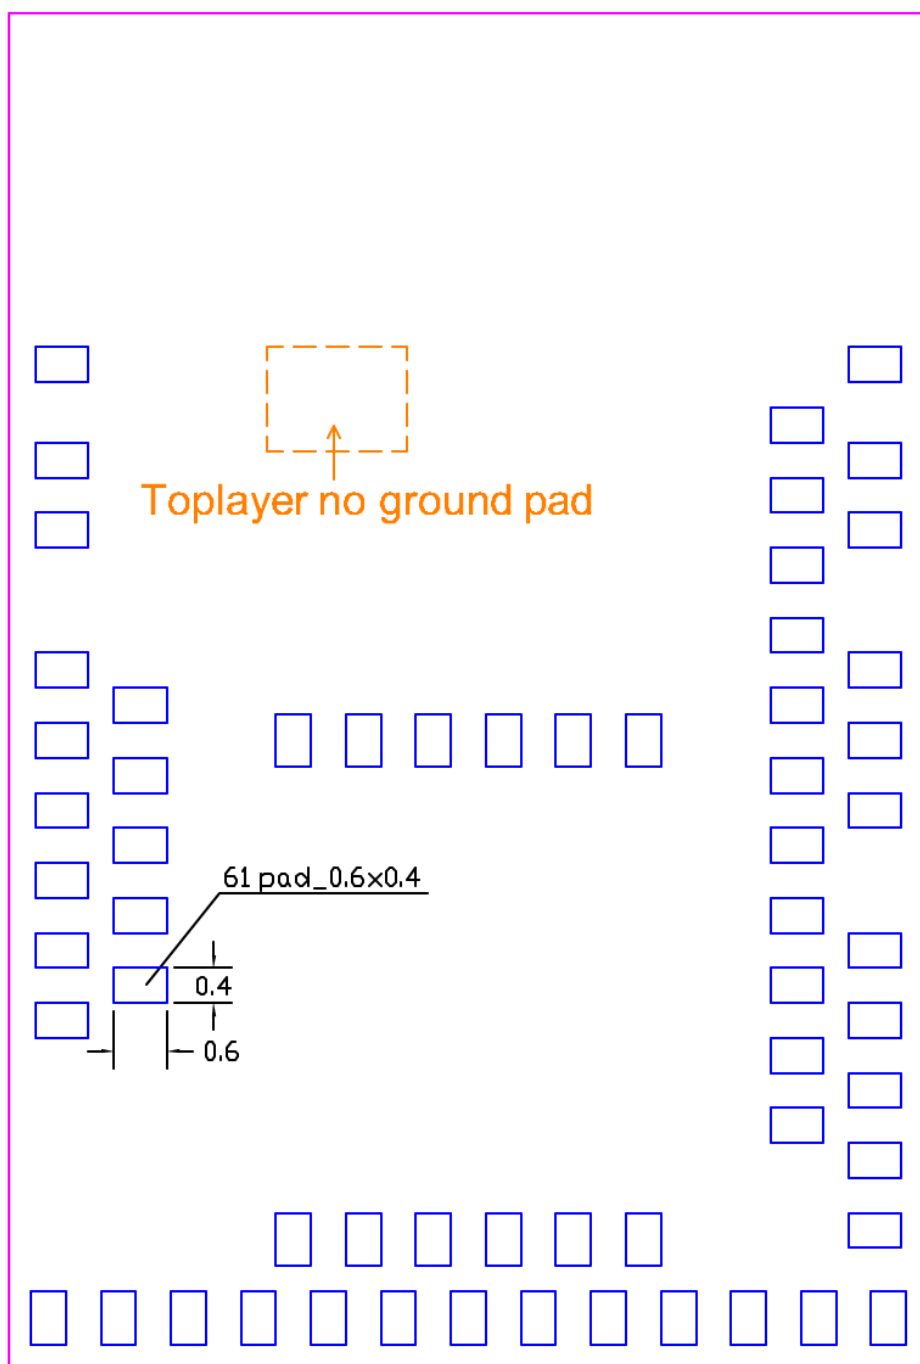

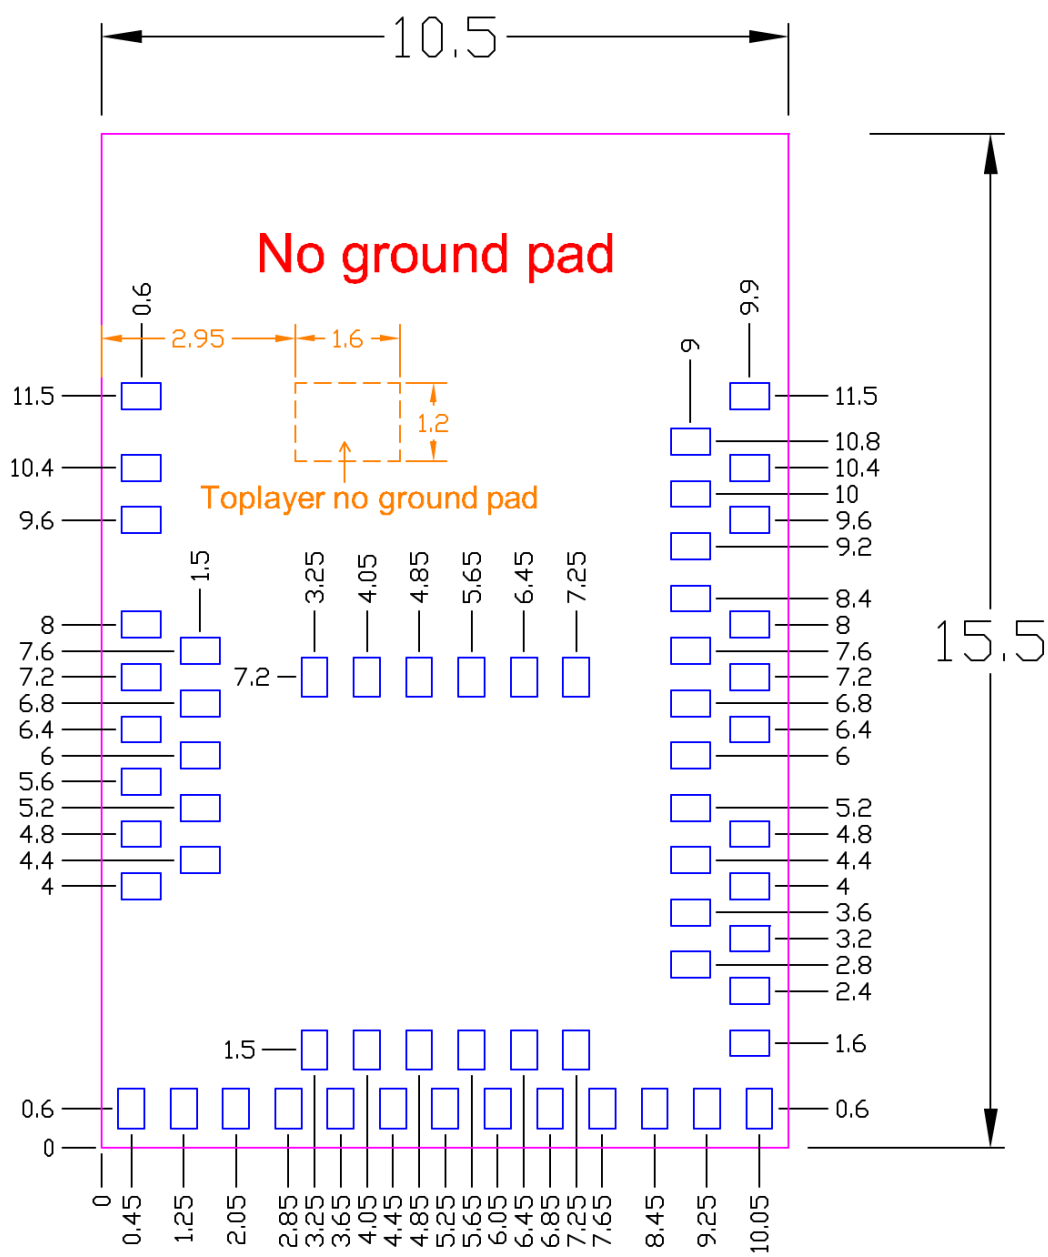

Top View (單位：mm)  
recommended solder pad layout


## 2.3. RF Layout Suggestion (aka Keep-Out Area)

Please follow below instruction to avoid from having Ground Pad in the area of our RF test pad. Otherwise, it may cause shortage to the module.


No Ground Pad should be included in the corresponding position of the antenna in **EACH LAYER**.

Place the module towards the edge of PCB to have better performance than placing it on the center.


Welcome to send us your layout in PDF for review at [service@raytac.com](mailto:service@raytac.com) or your contact at Raytac with title "Layout reviewing – Raytac model no. – YOUR company's name".

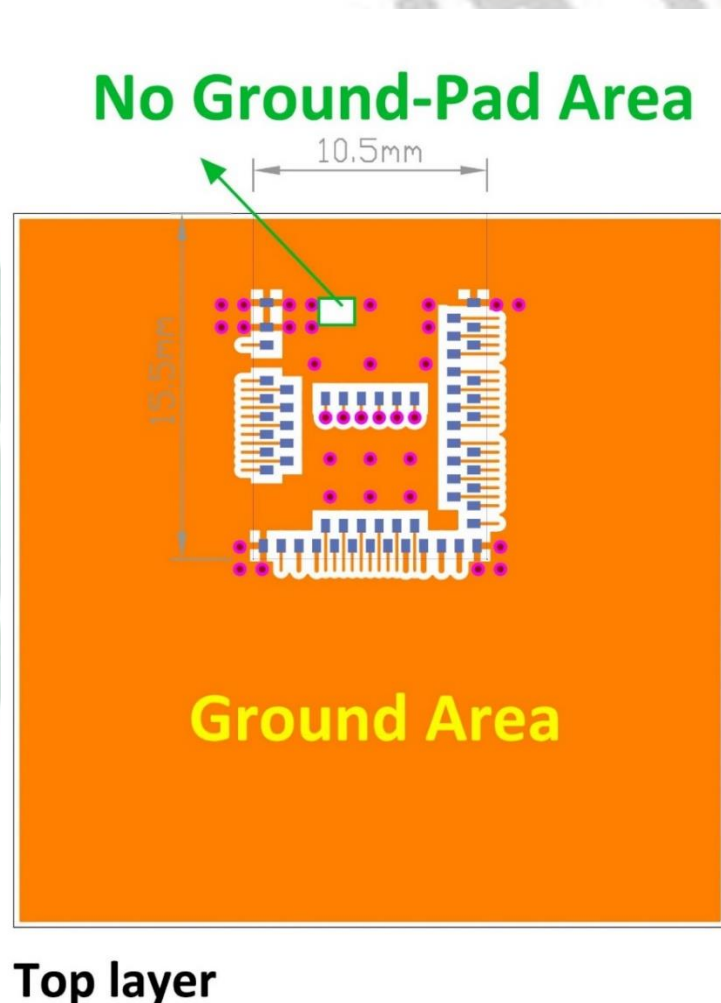

Please add via holes in GROUND area as many as possible, especially around the four corners.

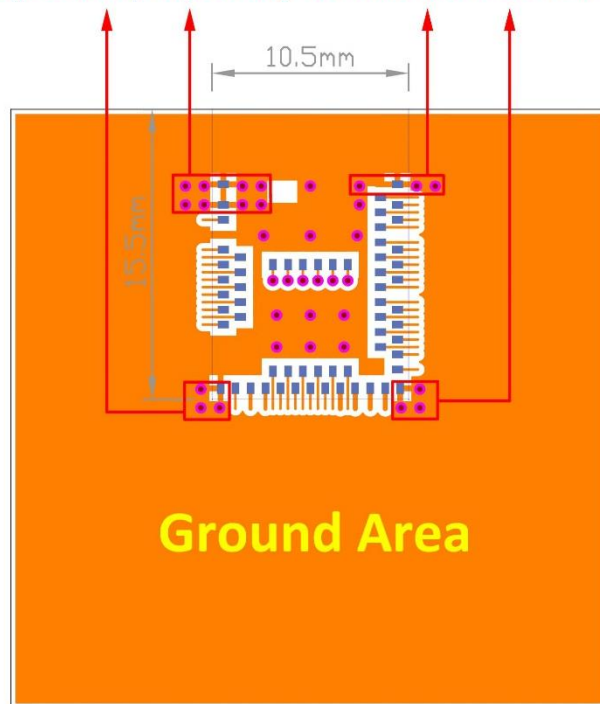

**Top layer**

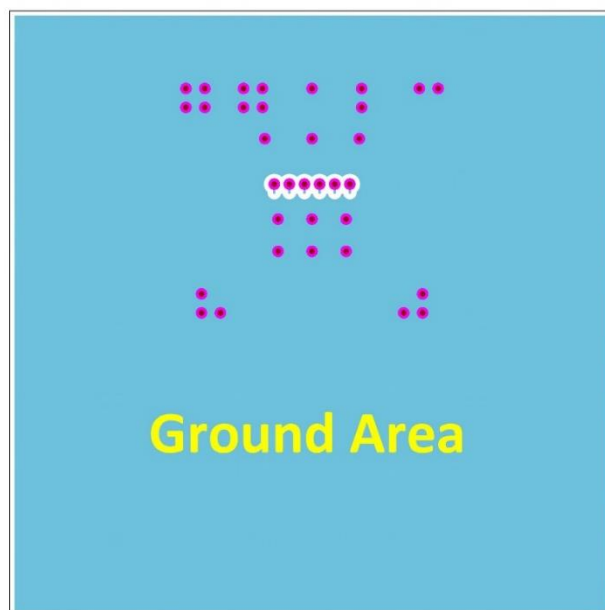

**Bottom layer**

## 2.4. Footprint & Design Guide

Please visit "[Support](#)" page of our website to download. The package includes footprint, 2D/3D drawing, reflow graph/solder profile and recommended spec for external 32.768khz.

## 2.5. Pin Assignment

| Pin No. | Name  | Pin Function | Description                                                     |
|---------|-------|--------------|-----------------------------------------------------------------|
| (1)     | GND   | Power        | Ground                                                          |
| (2)     | GND   | Power        | Ground                                                          |
| (3)     | P1.10 | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
| (4)     | P1.11 | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
| (5)     | P1.12 | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
| (6)     | P1.13 | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
| (7)     | P1.14 | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
| (8)     | P1.15 | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
| (9)     | P0.03 | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
|         | AIN1  | Analog input | Analog input                                                    |
| (10)    | P0.29 | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
|         | AIN5  | Analog input | Analog input                                                    |
| (11)    | P0.02 | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
|         | AIN0  | Analog input | Analog input                                                    |
| (12)    | P0.31 | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
|         | AIN7  | Analog input | Analog input                                                    |
| (13)    | P0.28 | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
|         | AIN4  | Analog input | Analog input                                                    |
| (14)    | P0.30 | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
|         | AIN6  | Analog input | Analog input                                                    |

| Pin No. | Name       | Pin Function | Description                       |
|---------|------------|--------------|-----------------------------------|
| (15)    | GND        | Power        | Ground                            |
| (16)    | P0.27      | Digital I/O  | General-purpose I/O               |
| (17)    | P0.00      | Digital I/O  | General-purpose I/O               |
|         | XL1        | Analog input | Connection for 32.768 kHz crystal |
| (18)    | P0.01      | Digital I/O  | General-purpose I/O               |
|         | XL2        | Analog input | Connection for 32.768 kHz crystal |
| (19)    | P0.26      | Digital I/O  | General-purpose I/O               |
| (20)    | P0.04      | Digital I/O  | General-purpose I/O               |
|         | AIN2       | Analog input | Analog input                      |
| (21)    | P0.05      | Digital I/O  | General-purpose I/O               |
|         | AIN3       | Analog input | Analog input                      |
| (22)    | P0.06      | Digital I/O  | General-purpose I/O               |
| (23)    | P0.07      | Digital I/O  | General-purpose I/O               |
|         | TRACECLK   | Trace clock  | Trace buffer clock                |
| (24)    | P0.08      | Digital I/O  | General-purpose I/O               |
| (25)    | P1.08      | Digital I/O  | General-purpose I/O               |
| (26)    | P1.09      | Digital I/O  | General-purpose I/O               |
|         | TRACEDATA3 | Trace data   | Trace buffer TRACEDATA [3].       |
| (27)    | P0.11      | Digital I/O  | General-purpose I/O               |
|         | TRACEDATA2 | Trace data   | Trace buffer TRACEDATA[2].        |
| (28)    | VDD        | Power        | Power supply                      |
| (29)    | P0.12      | Digital I/O  | General-purpose I/O               |
|         | TRACEDATA1 | Trace data   | Trace buffer TRACEDATA [1].       |
| (30)    | VDDH       | Power        | High voltage power supply         |
| (31)    | DCCH       | Power        | DC/DC converter output            |
| (32)    | VBUS       | Power        | 5V input for USB 3.3V regulator   |
| (33)    | GND        | Power        | Ground                            |
| (34)    | D-         | Digital I/O  | USB D-                            |
| (35)    | D+         | Digital I/O  | USB D+                            |

| Pin No. | Name       | Pin Function | Description                                                     |
|---------|------------|--------------|-----------------------------------------------------------------|
| (36)    | P0.14      | Digital I/O  | General-purpose digital I/O                                     |
| (37)    | P0.13      | Digital I/O  | General-purpose digital I/O                                     |
| (38)    | P0.16      | Digital I/O  | General-purpose digital I/O                                     |
| (39)    | P0.15      | Digital I/O  | General-purpose digital I/O                                     |
| (40)    | P0.18      | Digital I/O  | General-purpose digital I/O<br>(recommended usage: QSPI / CSN)  |
|         | nRESET     |              | Configurable as system RESET                                    |
| (41)    | P0.17      | Digital I/O  | General-purpose digital I/O                                     |
| (42)    | P0.19      | Digital I/O  | General-purpose digital I/O<br>(recommended usage: (QSPI / SCK) |
| (43)    | P0.21      | Digital I/O  | General-purpose digital I/O<br>(recommended usage: QSPI)        |
| (44)    | P0.20      | Digital I/O  | General-purpose digital I/O                                     |
| (45)    | P0.23      | Digital I/O  | General-purpose digital I/O<br>(recommended usage: QSPI)        |
| (46)    | P0.22      | Digital I/O  | General-purpose digital I/O<br>(recommended usage: QSPI)        |
| (47)    | P1.00      | Digital I/O  | General-purpose digital I/O<br>(recommended usage: QSPI)        |
|         | TRACEDATA0 | Trace data   | Trace buffer TRACEDATA [0].                                     |
| (48)    | P0.24      | Digital I/O  | General-purpose digital I/O                                     |
| (49)    | P0.25      | Digital I/O  | General-purpose digital I/O                                     |
| (50)    | P1.02      | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
| (51)    | SWDIO      | Debug        | Serial wire debug I/O for debug and programming                 |
| (52)    | P0.09      | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
|         | NFC1       | NFC input    | NFC antenna connection                                          |
| (53)    | SWDCLK     | Debug        | Serial wire debug clock input for debug and programming         |
| (54)    | P0.10      | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
|         | NFC2       | NFC input    | NFC antenna connection                                          |
| (55)    | GND        | Power        | Ground                                                          |

| Pin No. | Name  | Pin function | Description                                                     |
|---------|-------|--------------|-----------------------------------------------------------------|
| (56)    | P1.04 | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
| (57)    | P1.06 | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
| (58)    | P1.07 | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
| (59)    | P1.05 | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
| (60)    | P1.03 | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |
| (61)    | P1.01 | Digital I/O  | General-purpose I/O<br>(standard drive, low frequency I/O only) |

## 2.6. GPIO Located Near the Radio

Please refer to [2.5 Pin Assignment](#) on page 16 to 18 where identifies some GPIO that have recommended usage. To maximize RF performance, these GPIO are only available to use under standard drive, low frequency I/O only, wrong usage may lead to undesirable performance.

*Low frequency I/O is a signal with a frequency up to 10 kHz. SPI, I2C, UART, PWM are NOT low frequency I/O.*

## 3. Main Chip Solution

| RF IC           | Crystal Frequency |
|-----------------|-------------------|
| Nordic NRF52840 | 32MHZ             |

*32MHz crystal and RF (VDD) DC/DC (Reg1) inductor are already inside the module.*

## 4. Shipment Packaging Information

| Model         | Antenna        | Photo                                                                               |
|---------------|----------------|-------------------------------------------------------------------------------------|
| MDBT50Q-U1MV2 | u.FL Connector |  |


**Module with one black dot is using revision 1 IC. The one without black dot is using revision 2 IC and date code starts from 914 and after.**

- Unit Weight of Module: 0.68g / pc ( $\pm 0.02$ g)
- Packaging Type: Anti-static tray or Tape & Reel


|                                                | Tray            | Tape & Reel        |
|------------------------------------------------|-----------------|--------------------|
| <b>MPQ<br/>(Min. Package Q'ty)</b>             | 88 pcs per tray | 1,056 pcs per reel |
| <b>Carton Contents<br/>(per carton)</b>        | 1,760 pcs       | 1,056 pcs          |
| <b>Carton Dimension<br/>(L) x (W) x (H) cm</b> | 37 x 21 x 13    | 37 x 36 x 6        |
| <b>Gross Weight</b>                            | about 2.8 kgs   | about 1.5 kgs      |

## 4.1. Marking on Metal Shield

Label contexts for date code 931 and after



For date code 839 to 931:



For date code 833 to 838:




There is no marking on metal shield for module(s) with date code *before* 833.


## 4.2. Packaging Info

### 4.2.1. Tray Packaging

Anti-static tray is specifically designed for mass production. It can be used directly on SMT automatic machine.

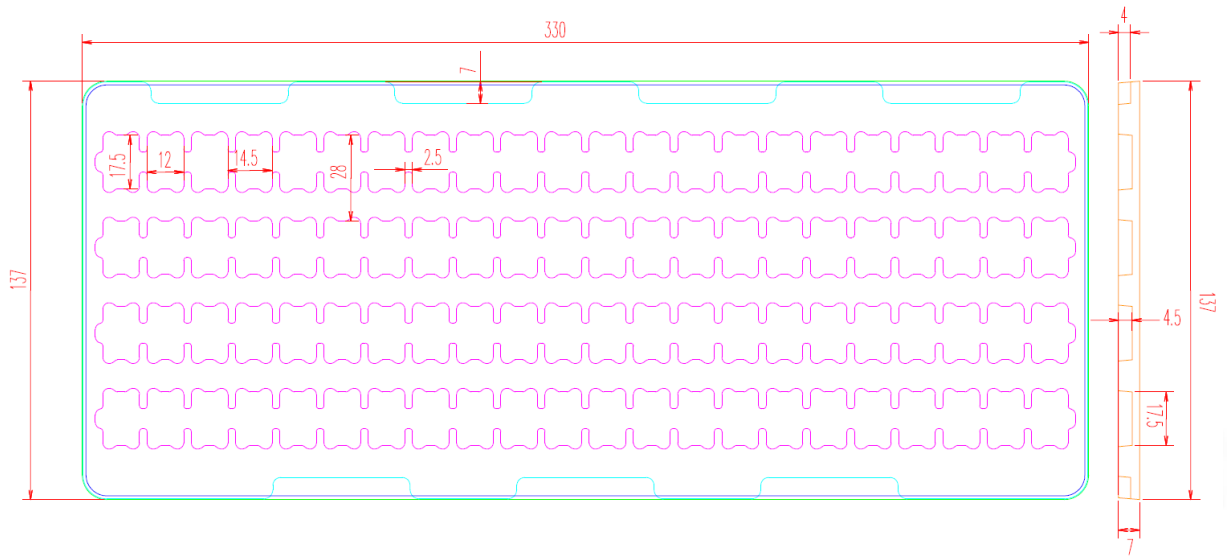

4.2.2. Tape & Reel Packaging

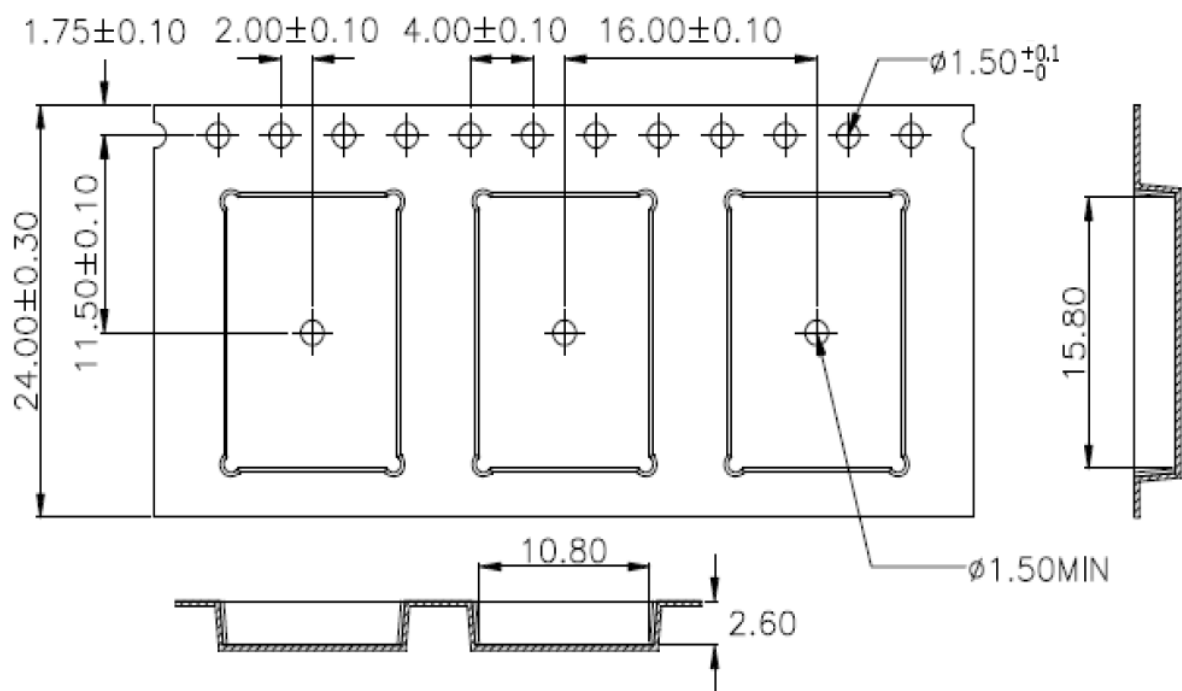

|    |       |       |            |
|----|-------|-------|------------|
| 1  | W     | 24.00 | $\pm 0.30$ |
| 2  | P1    | 16.00 | $\pm 0.10$ |
| 3  | E1    | 1.75  | $\pm 0.10$ |
| 4  | F     | 11.50 | $\pm 0.10$ |
| 5  | D0    | 1.50  | $+0.1/-0$  |
| 6  | P0    | 4.00  | $\pm 0.10$ |
| 7  | P0X10 | 40.00 | $\pm 0.20$ |
| 8  | P2    | 2.00  | $\pm 0.10$ |
| 9  | S0    | —     |            |
| 10 | D1    | —     |            |
| 11 | A0    | 10.80 | $\pm 0.10$ |
| 12 | B0    | 15.80 | $\pm 0.10$ |
| 13 | K0    | 2.60  | $\pm 0.10$ |
| 14 | K1    | —     |            |
| 15 | T     | 0.30  | $\pm 0.05$ |

### 4.3. Order Code

Each model has two options of packaging. Please use following part no. when placing order to us.

| Model         | Tray         | Tape & Reel   |
|---------------|--------------|---------------|
| MDBT50Q-U1MV2 | MD-240A3-009 | MD-240A3-009R |

*Note that MPQ of Reel packaging is 1,056 pcs and Tray packaging is 88 pcs.*



## 5. Specification

Any technical spec shall refer to Nordic's official documents as final reference. Contents below are from "[nRF52840 Product Specification v1.1](#)", please click to download full spec.

### 5.1. Absolute Maximum Ratings

|                                    | Note                       | Min.             | Max.      | Unit               |
|------------------------------------|----------------------------|------------------|-----------|--------------------|
| <b>Supply voltages</b>             |                            |                  |           |                    |
| VDD                                |                            | -0.3             | +3.9      | V                  |
| VDDH                               |                            | -0.3             | +5.8      | V                  |
| VBUS                               |                            | -0.3             | +5.8      | V                  |
| VSS                                |                            |                  | 0         | V                  |
| <b>I/O pin voltage</b>             |                            |                  |           |                    |
| V <sub>I/O</sub> , VDD ≤ 3.6 V     |                            | -0.3             | VDD + 0.3 | V                  |
| V <sub>I/O</sub> , VDD > 3.6 V     |                            | -0.3             | 3.9       | V                  |
| <b>NFC antenna pin current</b>     |                            |                  |           |                    |
| I <sub>NFC1/2</sub>                |                            |                  | 80        | mA                 |
| <b>Radio</b>                       |                            |                  |           |                    |
| RF input level                     |                            |                  | 10        | dBm                |
| <b>Environmental aQFN™ package</b> |                            |                  |           |                    |
| Storage temperature                |                            | -40              | +125      | °C                 |
| MSL                                | Moisture Sensitivity Level |                  | 2         |                    |
| ESD HBM                            | Human Body Model           |                  | 2         | kV                 |
| ESD HBM Class                      | Human Body Model Class     |                  | 2         |                    |
| <b>Flash memory</b>                |                            |                  |           |                    |
| Endurance                          |                            | 10 000           |           | Write/erase cycles |
| Retention                          |                            | 10 years at 40°C |           |                    |

### 5.2. Operating Conditions

| Symbol              | Parameter                                       | Min. | Nom. | Max. | Units |
|---------------------|-------------------------------------------------|------|------|------|-------|
| VDD                 | VDD supply voltage, independent of DCDC enable  | 1.7  | 3.0  | 3.6  | V     |
| VDD <sub>POR</sub>  | VDD supply voltage needed during power-on reset | 1.75 |      |      | V     |
| VDDH                | VDDH supply voltage, independent of DCDC enable | 2.5  | 3.7  | 5.5  | V     |
| VBUS                | VBUS USB supply voltage                         | 4.35 | 5    | 5.5  | V     |
| t <sub>R_VDD</sub>  | Supply rise time (0 V to 1.7 V)                 |      |      | 60   | ms    |
| t <sub>R_VDDH</sub> | Supply rise time (0 V to 3.7 V)                 |      |      | 100  | ms    |
| TA                  | Operating temperature                           | -40  | 25   | 85   | °C    |

\*\*\* The on-chip power-on reset circuitry may not function properly for rise times longer than the specified maximum.

## 5.3. Electrical Specifications

### 5.3.1. General Radio Characteristics

| Symbol                    | Description                      | Min. | Typ.      | Max. | Units  |
|---------------------------|----------------------------------|------|-----------|------|--------|
| $f_{OP}$                  | Operating frequencies            | 2360 |           | 2500 | MHz    |
| $f_{PLL,CH,SP}$           | PLL channel spacing              |      | 1         |      | MHz    |
| $f_{\Delta,1M}$           | Frequency deviation @ 1 Mbps     |      | $\pm 170$ |      | kHz    |
| $f_{\Delta,BLE,1M}$       | Frequency deviation @ BLE 1 Mbps |      | $\pm 250$ |      | kHz    |
| $f_{\Delta,2M}$           | Frequency deviation @ 2 Mbps     |      | $\pm 320$ |      | kHz    |
| $f_{\Delta,BLE,2M}$       | Frequency deviation @ BLE 2 Mbps |      | $\pm 500$ |      | kHz    |
| $f_{skBps}$               | On the air data rate             | 125  |           | 2000 | kbps   |
| $f_{chip, IEEE 802.15.4}$ | Chip rate in IEEE 802.15.4 mode  |      | 2000      |      | kchips |

### 5.3.2. Radio Current Consumption (Transmitter)

| Symbol                         | Description                                                         | Min. | Typ. | Max. | Units |
|--------------------------------|---------------------------------------------------------------------|------|------|------|-------|
| $I_{TX,PLUS8dBm,DCDC}$         | TX only run current (DC/DC, 3 V) $P_{RF} = +8$ dBm                  | ..   | 14.8 | ..   | mA    |
| $I_{TX,PLUS8dBm}$              | TX only run current $P_{RF} = +8$ dBm                               | ..   | 32.7 | ..   | mA    |
| $I_{TX,PLUS4dBm,DCDC}$         | TX only run current (DC/DC, 3 V) $P_{RF} = +4$ dBm                  | ..   | 9.6  | ..   | mA    |
| $I_{TX,PLUS4dBm}$              | TX only run current $P_{RF} = +4$ dBm                               | ..   | 21.4 | ..   | mA    |
| $I_{TX,0dBm,DCDC,5V,REG0HIGH}$ | TX only run current (DC/DC, 5 V, REG0 out = 3.3 V) $P_{RF} = 0$ dBm |      | 3.0  |      | mA    |
| $I_{TX,0dBm,DCDC,5V,REG0L}$    | TX only run current (DC/DC, 5 V, REG0 out = 1.8 V) $P_{RF} = 0$ dBm |      | 3.0  |      | mA    |
| $I_{TX,0dBm,DCDC}$             | TX only run current (DC/DC, 3 V) $P_{RF} = 0$ dBm                   | ..   | 4.8  |      | mA    |
| $I_{TX,0dBm}$                  | TX only run current $P_{RF} = 0$ dBm                                | ..   | 10.6 | ..   | mA    |
| $I_{TX,MINUS4dBm,DCDC}$        | TX only run current DC/DC, 3 V $P_{RF} = -4$ dBm                    | ..   | 3.1  | ..   | mA    |
| $I_{TX,MINUS4dBm}$             | TX only run current $P_{RF} = -4$ dBm                               | ..   | 8.1  | ..   | mA    |
| $I_{TX,MINUS8dBm,DCDC}$        | TX only run current DC/DC, 3 V $P_{RF} = -8$ dBm                    |      | 3.3  |      | mA    |
| $I_{TX,MINUS8dBm}$             | TX only run current $P_{RF} = -8$ dBm                               | ..   | 7.2  |      | mA    |
| $I_{TX,MINUS12dBm,DCDC}$       | TX only run current DC/DC, 3 V $P_{RF} = -12$ dBm                   |      | 3.0  |      | mA    |
| $I_{TX,MINUS12dBm}$            | TX only run current $P_{RF} = -12$ dBm                              | ..   | 6.4  | ..   | mA    |
| $I_{TX,MINUS16dBm,DCDC}$       | TX only run current DC/DC, 3 V $P_{RF} = -16$ dBm                   |      | 2.8  |      | mA    |
| $I_{TX,MINUS16dBm}$            | TX only run current $P_{RF} = -16$ dBm                              | ..   | 6.0  | ..   | mA    |
| $I_{TX,MINUS20dBm,DCDC}$       | TX only run current DC/DC, 3 V $P_{RF} = -20$ dBm                   |      | 2.7  |      | mA    |
| $I_{TX,MINUS20dBm}$            | TX only run current $P_{RF} = -20$ dBm                              | ..   | 5.6  | ..   | mA    |

### 5.3.3. Radio Current Consumption (Receiver)

| Symbol                 | Description                                          | Min. | Typ. | Max. | Units |
|------------------------|------------------------------------------------------|------|------|------|-------|
| $I_{RX,1M,DCDC}$       | RX only run current (DC/DC, 3 V) 1 Mbps / 1 Mbps BLE | ..   | 4.6  | ..   | mA    |
| $I_{RX,1M}$            | RX only run current (LDO, 3 V) 1 Mbps / 1 Mbps BLE   | ..   | 9.9  | ..   | mA    |
| $I_{RX,2M,DCDC}$       | RX only run current (DC/DC, 3 V) 2 Mbps / 2 Mbps BLE | ..   | 5.2  | ..   | mA    |
| $I_{RX,2M}$            | RX only run current (LDO, 3 V) 2 Mbps / 2 Mbps BLE   | ..   | 11.1 | ..   | mA    |
| $I_{START,RX,1M,DCDC}$ | RX start-up current (DC/DC, 3 V) 1 Mbps / 1 Mbps BLE |      | 3.7  |      | mA    |
| $I_{START,RX,1M}$      | RX start-up current 1 Mbps / 1 Mbps BLE              |      | 6.7  |      | mA    |

### 5.3.4. Transmitter Specification

| Symbol                       | Description                                        | Min. | Typ.  | Max. | Units |
|------------------------------|----------------------------------------------------|------|-------|------|-------|
| $P_{RF}$                     | Maximum output power                               | ..   | 8.0   | ..   | dBm   |
| $P_{RFC}$                    | RF power control range                             |      | 28.0  |      | dB    |
| $P_{RFCR}$                   | RF power accuracy                                  |      |       | ±4   | dB    |
| $P_{RF1,1}$                  | 1st Adjacent Channel Transmit Power 1 MHz (1 Mbps) | ..   | -24.8 | ..   | dBc   |
| $P_{RF2,1}$                  | 2nd Adjacent Channel Transmit Power 2 MHz (1 Mbps) | ..   | -54.0 | ..   | dBc   |
| $P_{RF1,2}$                  | 1st Adjacent Channel Transmit Power 2 MHz (2 Mbps) | ..   | -25   | ..   | dBc   |
| $P_{RF2,2}$                  | 2nd Adjacent Channel Transmit Power 4 MHz (2 Mbps) | ..   | -54.0 | ..   | dBc   |
| $E_{vm}$                     | Error vector magnitude IEEE 802.15.4               | ..   | 8     | ..   | %rms  |
| $P_{harm2nd, IEEE 802.15.4}$ | 2nd harmonics in IEEE 802.15.4 mode                | ..   | -51.0 | ..   | dBm   |
| $P_{harm3rd, IEEE 802.15.4}$ | 3rd harmonics in IEEE 802.15.4                     |      | -48.0 | ..   | dBm   |

### 5.3.5. RSSI Specification

| Symbol              | Description                                  | Min. | Typ. | Max. | Units |
|---------------------|----------------------------------------------|------|------|------|-------|
| $RSSI_{ACC}$        | RSSI accuracy valid range -90 to -20 dBm     |      | ±2   |      | dB    |
| $RSSI_{RESOLUTION}$ | RSSI resolution                              |      | 1    |      | dB    |
| $RSSI_{PERIOD}$     | RSSI sampling time from $RSSI\_START$ task   |      | 0.25 |      | μs    |
| $RSSI_{SETTLE}$     | RSSI settling time after signal level change |      | 15   |      | μs    |

## 5.3.6. Receiver Operation

| Symbol                          | Description                                                                                | Min. | Typ. | Max. | Units |
|---------------------------------|--------------------------------------------------------------------------------------------|------|------|------|-------|
| P <sub>RX,MAX</sub>             | Maximum received signal strength at < 0.1% PER                                             |      | 0    |      | dBm   |
| P <sub>SENS,IT,1M</sub>         | Sensitivity, 1 Mbps nRF mode ideal transmitter <sup>1</sup>                                |      | -93  |      | dBm   |
| P <sub>SENS,IT,2M</sub>         | Sensitivity, 2 Mbps nRF mode ideal transmitter <sup>2</sup>                                |      | -89  |      | dBm   |
| P <sub>SENS,IT,SP,1M,BLE</sub>  | Sensitivity, 1 Mbps BLE ideal transmitter, packet length ≤ 37 bytes BER=1E-3 <sup>3</sup>  |      | -95  |      | dBm   |
| P <sub>SENS,IT,LP,1M,BLE</sub>  | Sensitivity, 1 Mbps BLE ideal transmitter, packet length ≥ 128 bytes BER=1E-4 <sup>4</sup> |      | -94  |      | dBm   |
| P <sub>SENS,IT,SP,2M,BLE</sub>  | Sensitivity, 2 Mbps BLE ideal transmitter, packet length ≤ 37 bytes                        |      | -92  |      | dBm   |
| P <sub>SENS,IT,BLE 125k</sub>   | Sensitivity, 125 kbps BLE mode                                                             |      | -103 |      | dBm   |
| P <sub>SENS,IT,BLE 500k</sub>   | Sensitivity, 500 kbps BLE mode                                                             |      | -99  |      | dBm   |
| P <sub>SENS,IEEE 802.15.4</sub> | Sensitivity in IEEE 802.15.4 mode                                                          |      | -100 |      | dBm   |

1. Typical sensitivity applies when ADDR0 is used for receiver address correlation. When ADDR[1...7] are used for receiver address correlation, the typical sensitivity for this mode is degraded by 3 dB.
2. Same as above.
3. As defined in the Bluetooth Core Specification v4.0 Volume 6: Core System Package (Low Energy Controller Volume)
4. Equivalent BER limit < 10E-04

## 5.3.7. RX Selectivity

| Symbol                          | Description                                              | Min. | Typ. | Max. | Units |
|---------------------------------|----------------------------------------------------------|------|------|------|-------|
| C/I <sub>1M,co-channel</sub>    | 1Mbps mode, Co-Channel interference                      |      | 9    |      | dB    |
| C/I <sub>1M,-1MHz</sub>         | 1 Mbps mode, Adjacent (-1 MHz) interference              |      | -2   |      | dB    |
| C/I <sub>1M,+1MHz</sub>         | 1 Mbps mode, Adjacent (+1 MHz) interference              |      | -10  |      | dB    |
| C/I <sub>1M,-2MHz</sub>         | 1 Mbps mode, Adjacent (-2 MHz) interference              |      | -19  |      | dB    |
| C/I <sub>1M,+2MHz</sub>         | 1 Mbps mode, Adjacent (+2 MHz) interference              |      | -42  |      | dB    |
| C/I <sub>1M,-3MHz</sub>         | 1 Mbps mode, Adjacent (-3 MHz) interference              |      | -38  |      | dB    |
| C/I <sub>1M,+3MHz</sub>         | 1 Mbps mode, Adjacent (+3 MHz) interference              |      | -48  |      | dB    |
| C/I <sub>1M,±6MHz</sub>         | 1 Mbps mode, Adjacent (≥6 MHz) interference              |      | -50  |      | dB    |
| C/I <sub>1MBLE,co-channel</sub> | 1 Mbps BLE mode, Co-Channel interference                 |      | 6    |      | dB    |
| C/I <sub>1MBLE,-1MHz</sub>      | 1 Mbps BLE mode, Adjacent (-1 MHz) interference          |      | -2   |      | dB    |
| C/I <sub>1MBLE,+1MHz</sub>      | 1 Mbps BLE mode, Adjacent (+1 MHz) interference          |      | -9   |      | dB    |
| C/I <sub>1MBLE,-2MHz</sub>      | 1 Mbps BLE mode, Adjacent (-2 MHz) interference          |      | -22  |      | dB    |
| C/I <sub>1MBLE,+2MHz</sub>      | 1 Mbps BLE mode, Adjacent (+2 MHz) interference          |      | -46  |      | dB    |
| C/I <sub>1MBLE,&gt;3MHz</sub>   | 1 Mbps BLE mode, Adjacent (≥3 MHz) interference          |      | -50  |      | dB    |
| C/I <sub>1MBLE,image</sub>      | Image frequency interference                             |      | -22  |      | dB    |
| C/I <sub>1MBLE,image,1MHz</sub> | Adjacent (1 MHz) interference to in-band image frequency |      | -35  |      | dB    |
| C/I <sub>2M,co-channel</sub>    | 2 Mbps mode, Co-Channel interference                     |      | 10   |      | dB    |

| Symbol                                 | Description                                              | Min. | Typ. | Max. | Units |
|----------------------------------------|----------------------------------------------------------|------|------|------|-------|
| C/I <sub>2M,-2MHz</sub>                | 2 Mbps mode, Adjacent (-2 MHz) interference              |      | 6    |      | dB    |
| C/I <sub>2M,+2MHz</sub>                | 2 Mbps mode, Adjacent (+2 MHz) interference              |      | -19  |      | dB    |
| C/I <sub>2M,-4MHz</sub>                | 2 Mbps mode, Adjacent (-4 MHz) interference              |      | -20  |      | dB    |
| C/I <sub>2M,+4MHz</sub>                | 2 Mbps mode, Adjacent (+4 MHz) interference              |      | -44  |      | dB    |
| C/I <sub>2M,-6MHz</sub>                | 2 Mbps mode, Adjacent (-6 MHz) interference              |      | -42  |      | dB    |
| C/I <sub>2M,+6MHz</sub>                | 2 Mbps mode, Adjacent (+6 MHz) interference              |      | -42  |      | dB    |
| C/I <sub>2M,≥12MHz</sub>               | 2 Mbps mode, Adjacent (≥12 MHz) interference             |      | -52  |      | dB    |
| C/I <sub>2MBLE,co-channel</sub>        | 2 Mbps BLE mode, Co-Channel interference                 |      | 6.8  |      | dB    |
| C/I <sub>2MBLE,±2MHz</sub>             | 2 Mbps BLE mode, Adjacent (±2 MHz) interference          |      | -10  |      | dB    |
| C/I <sub>2MBLE,±4MHz</sub>             | 2 Mbps BLE mode, Adjacent (±4 MHz) interference          |      | -45  |      | dB    |
| C/I <sub>2MBLE,≥6MHz</sub>             | 2 Mbps BLE mode, Adjacent (≥6 MHz) interference          |      | -48  |      | dB    |
| C/I <sub>2MBLE,image</sub>             | Image frequency interference                             |      | -24  |      | dB    |
| C/I <sub>2MBLE,image, 2MHz</sub>       | Adjacent (2 MHz) interference to in-band image frequency |      | -35  |      | dB    |
| C/I <sub>125k BLE LR, co-channel</sub> | 125 kbps BLE LR mode, Co-Channel interference            |      | 4.4  |      | dB    |
| C/I <sub>125k BLE LR,-1MHz</sub>       | 125 kbps BLE LR mode, Adjacent (-1 MHz) interference     |      | -4.0 |      | dB    |
| C/I <sub>125k BLE LR,+1MHz</sub>       | 125 kbps BLE LR mode, Adjacent (+1 MHz) interference     |      | -12  |      | dB    |
| C/I <sub>125k BLE LR,-2MHz</sub>       | 125 kbps BLE LR mode, Adjacent (-2 MHz) interference     |      | -28  |      | dB    |
| C/I <sub>125k BLE LR,+2MHz</sub>       | 125 kbps BLE LR mode, Adjacent (+2 MHz) interference     |      | -50  |      | dB    |
| C/I <sub>125k BLE LR,&gt;3MHz</sub>    | 125 kbps BLE LR mode, Adjacent (≥3 MHz) interference     |      | -55  |      | dB    |
| C/I <sub>125k BLE LR,image</sub>       | Image frequency interference                             |      | -29  |      | dB    |

Remark: Wanted signal level at PIN = -67 dBm. One interferer is used, having equal modulation as the wanted signal. The input power of the interferer where the sensitivity equals BER = 0.1% is presented.

### 5.3.8. RX Intermodulation

| Symbol                      | Description                                                                  | Min. | Typ. | Max. | Units |
|-----------------------------|------------------------------------------------------------------------------|------|------|------|-------|
| P <sub>IMD,5TH,1M</sub>     | IMD performance, 1 Msps, 5th offset channel, Packet length<br>≤ 37 bytes     |      | -33  |      | dBm   |
| P <sub>IMD,5TH,1M,BLE</sub> | IMD performance, BLE 1 Msps, 5th offset channel, Packet<br>length ≤ 37 bytes |      | -30  |      | dBm   |
| P <sub>IMD,5TH,2M</sub>     | IMD performance, 2 Msps, 5th offset channel, Packet length<br>≤ 37 bytes     |      | -33  |      | dBm   |
| P <sub>IMD,5TH,2M,BLE</sub> | IMD performance, BLE 2 Msps, 5th offset channel, Packet<br>length ≤ 37 bytes |      | -31  |      | dBm   |

Remark: Wanted signal level at PIN = -64dBm. Two interferers with equal input power are used. The interferer closet in frequency is not modulated, the other interferer is modulated equal with the wanted signal. The input power of the interferers where the sensitivity equals BER = 0.1% is presented.

## 5.3.9. Radio Timing Parameters

| Symbol                         | Description                                                                                                                   | Min. | Typ. | Max. | Units   |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------|------|------|------|---------|
| $t_{TXEN,BLE,1M}$              | Time between TXEN task and READY event after channel FREQUENCY configured (1 Mbps BLE and 150 $\mu$ s TIFS)                   | 140  |      | 140  | $\mu$ s |
| $t_{TXEN,FAST,BLE,1M}$         | Time between TXEN task and READY event after channel FREQUENCY configured (1 Mbps BLE with fast ramp-up and 150 $\mu$ s TIFS) | 40   |      | 40   | $\mu$ s |
| $t_{TXDIS,BLE,1M}$             | When in TX, delay between DISABLE task and DISABLED event for MODE = Nrf_1Mbit and MODE = Ble_1Mbit                           | 6    |      | 6    | $\mu$ s |
| $t_{RXEN,BLE,1M}$              | Time between the RXEN task and READY event after channel FREQUENCY configured (1 Mbps BLE)                                    | 140  |      | 140  | $\mu$ s |
| $t_{RXEN,FAST,BLE,1M}$         | Time between the RXEN task and READY event after channel FREQUENCY configured (1 Mbps BLE with fast ramp-up)                  | 40   |      | 40   | $\mu$ s |
| $t_{RXDIS,BLE,1M}$             | When in RX, delay between DISABLE task and DISABLED event for MODE = Nrf_1Mbit and MODE = Ble_1Mbit                           | 0    |      | 0    | $\mu$ s |
| $t_{TXDIS,BLE,2M}$             | When in TX, delay between DISABLE task and DISABLED event for MODE = Nrf_2Mbit and MODE = Ble_2Mbit                           | 4    |      | 4    | $\mu$ s |
| $t_{RXDIS,BLE,2M}$             | When in RX, delay between DISABLE task and DISABLED event for MODE = Nrf_2Mbit and MODE = Ble_2Mbit                           | 0    |      | 0    | $\mu$ s |
| $t_{TXEN,IEEE\ 802.15.4}$      | Time between TXEN task and READY event after channel FREQUENCY configured (IEEE 802.15.4)                                     | 130  |      | 130  | $\mu$ s |
| $t_{TXEN,FAST,IEEE\ 802.15.4}$ | Time between TXEN task and READY event after channel FREQUENCY configured (IEEE 802.15.4 with fast ramp-up)                   | 40   |      | 40   | $\mu$ s |
| $t_{TXDIS,IEEE\ 802.15.4}$     | When in TX, delay between DISABLE task and DISABLED event (IEEE 802.15.4)                                                     | 21   |      | 21   | $\mu$ s |
| $t_{RXEN,IEEE\ 802.15.4}$      | Time between the RXEN task and READY event after channel FREQUENCY configured (IEEE 802.15.4)                                 | 130  |      | 130  | $\mu$ s |
| $t_{RXEN,FAST,IEEE\ 802.15.4}$ | Time between the RXEN task and READY event after channel FREQUENCY configured (IEEE 802.15.4 with fast ramp-up)               | 40   |      | 40   | $\mu$ s |
| $t_{RXDIS,IEEE\ 802.15.4}$     | When in RX, delay between DISABLE task and DISABLED event (IEEE 802.15.4)                                                     | 0.5  |      | 0.5  | $\mu$ s |
| $t_{RX-to-TX\ turnaround}$     | Maximum TX-to-RX or RX-to-TX turnaround time in IEEE 802.15.4 mode                                                            |      | 40   |      | $\mu$ s |


### 5.3.10. CPU

| Symbol                  | Description                                                          | Min. | Typ. | Max. | Units            |
|-------------------------|----------------------------------------------------------------------|------|------|------|------------------|
| W <sub>FLASH</sub>      | CPU wait states, running CoreMark from flash, cache disabled         |      |      | 2    |                  |
| W <sub>FLASHCACHE</sub> | CPU wait states, running CoreMark from flash, cache enabled          |      |      | 3    |                  |
| W <sub>RAM</sub>        | CPU wait states, running CoreMark from RAM                           |      |      | 0    |                  |
| CM <sub>FLASH</sub>     | CoreMark, running CoreMark from flash, cache enabled                 |      | 212  |      | Coref            |
| CM <sub>FLASH/MHz</sub> | CoreMark per MHz, running CoreMark from flash, cache enabled         |      | 3.3  |      | CoreMark/<br>MHz |
| CM <sub>FLASH/mA</sub>  | CoreMark per mA, running CoreMark from flash, cache enabled, DCDC 3V |      | 59   |      | Coref<br>mA      |

### 5.3.11. Power Management

| Symbol                           | Description                                                                             | Min. | Typ.  | Max. | Units |
|----------------------------------|-----------------------------------------------------------------------------------------|------|-------|------|-------|
| I <sub>ON_RAMOFF_EVENT</sub>     | System ON, no RAM retention, wake on any event                                          |      | 0.97  |      | μA    |
| I <sub>ON_RAMON_EVENT</sub>      | System ON, full 256 kB RAM retention, wake on any event                                 |      | 2.35  |      | μA    |
| I <sub>ON_RAMON_POF</sub>        | System ON, full 256 kB RAM retention, wake on any event, power-fail comparator enabled  |      | 2.35  |      | μA    |
| I <sub>ON_RAMON_GPIOTE</sub>     | System ON, full 256 kB RAM retention, wake on GPIOTE input (event mode)                 |      | 17.37 |      | μA    |
| I <sub>ON_RAMON_GPIOTEPORT</sub> | System ON, full 256 kB RAM retention, wake on GPIOTE PORT event                         |      | 2.36  |      | μA    |
| I <sub>ON_RAMOFF_RTC</sub>       | System ON, no RAM retention, wake on RTC (running from LFRC clock)                      |      | 1.5   |      | μA    |
| I <sub>ON_RAMON_RTC</sub>        | System ON, full 256 kB RAM retention, wake on RTC (running from LFRC clock)             |      | 3.16  |      | μA    |
| I <sub>OFF_RAMOFF_RESET</sub>    | System OFF, no RAM retention, wake on reset                                             |      | 0.40  |      | μA    |
| I <sub>OFF_RAMOFF_LPCOMP</sub>   | System OFF, no RAM retention, wake on LPCOMP                                            |      | 0.86  |      | μA    |
| I <sub>OFF_RAMON_RESET</sub>     | System OFF, full 256 kB RAM retention, wake on reset                                    |      | 1.86  |      | μA    |
| I <sub>ON_RAMOFF_EVENT_5V</sub>  | System ON, no RAM retention, wake on any event, 5 V supply on VDDH, REG0 output = 3.3 V |      | 1.29  |      | μA    |
| I <sub>OFF_RAMOFF_RESET_5V</sub> | System OFF, no RAM retention, wake on reset, 5 V supply on VDDH, REG0 output = 3.3 V    |      | 0.95  |      | μA    |

## 6. Block Diagram

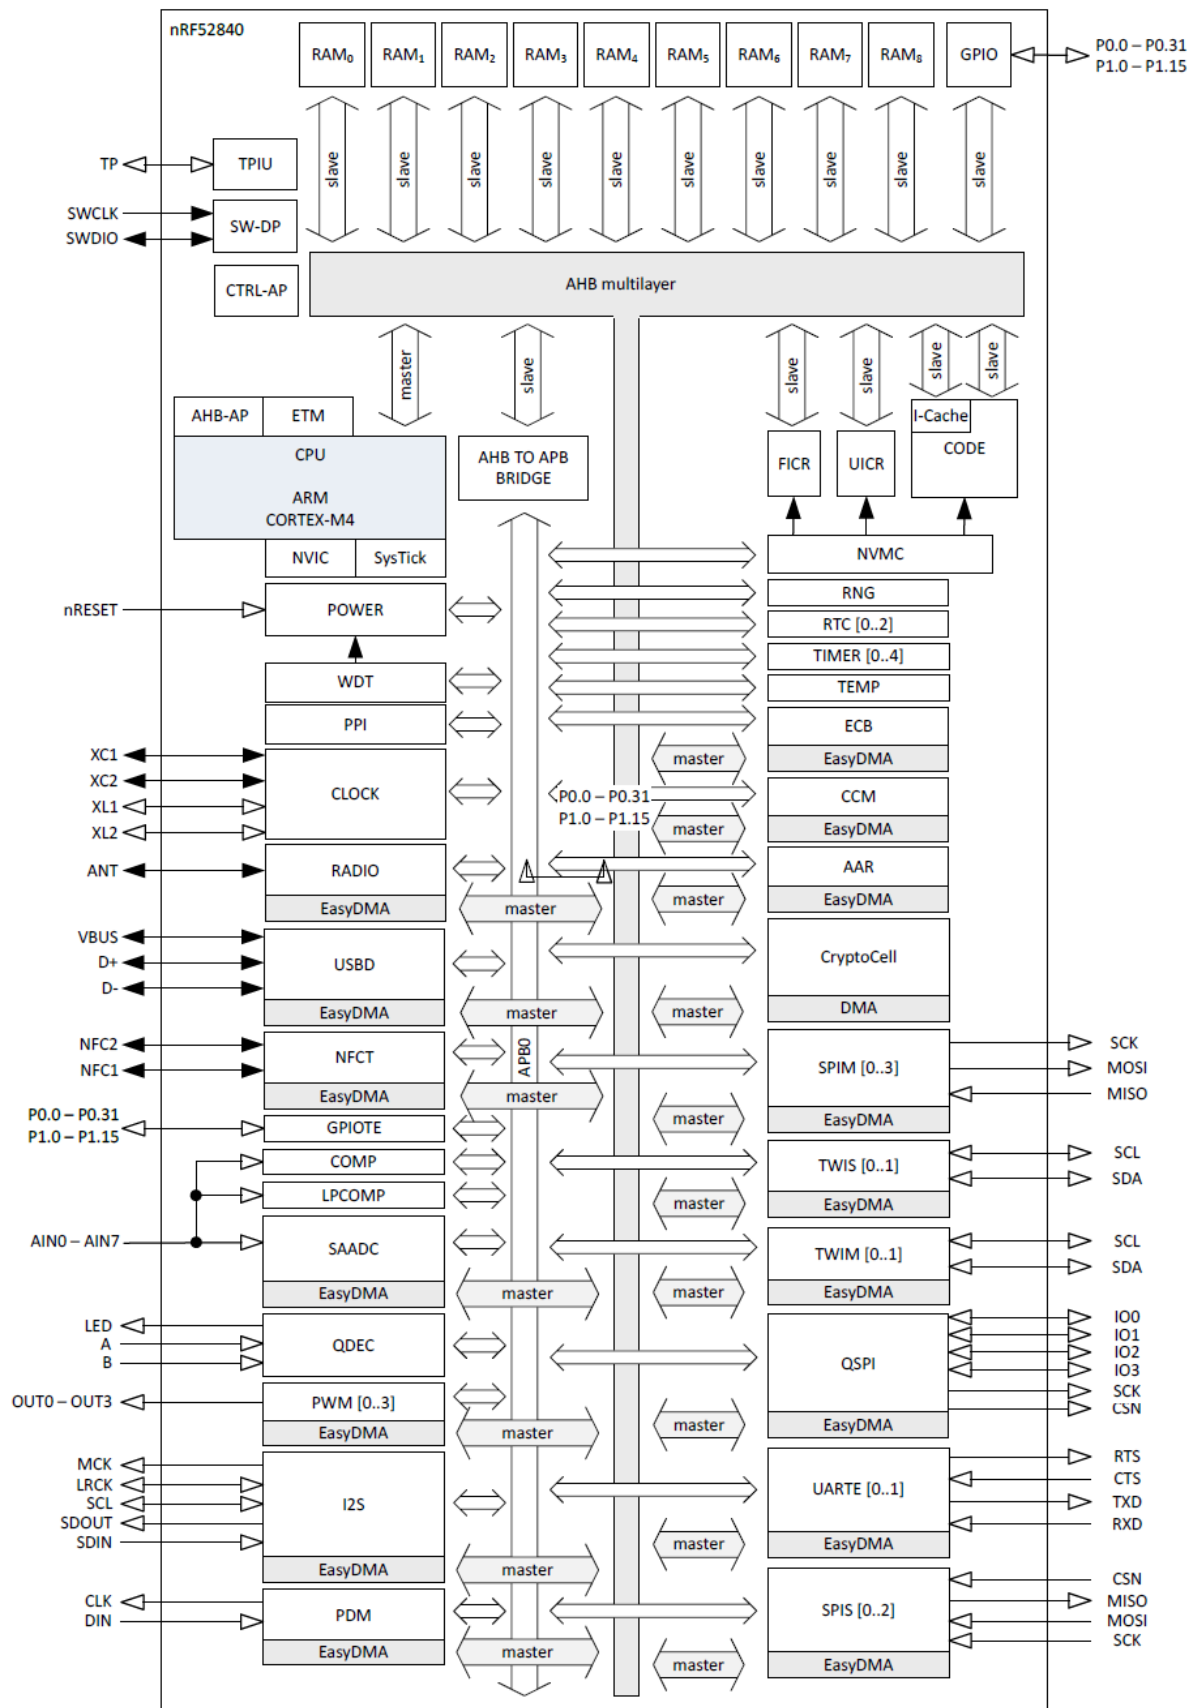

## 7. Antenna

Below chart shows a few options of external antenna which has been tested and approved to use with MDBT50Q-U. Please check [9 Certification](#) for more details.

| # | Photo                                                                               | Model No.                | Type     | Supplier  | Gain         | Spec                                                                                  | Certification                              |
|---|-------------------------------------------------------------------------------------|--------------------------|----------|-----------|--------------|---------------------------------------------------------------------------------------|--------------------------------------------|
| 1 |    | ANTX100<br>ETHAB24553    | External | Yageo     | $\leq 2$ dBi |    | FCC, IC, TELEC<br>KC, NCC, CE<br>SRRC, RCM |
| 2 |    | RFA-02-5<br>-F17H170100B | External | Aristotle | 5 dBi        |    | FCC, IC, KC<br>NCC, SRRC                   |
| 3 |    | ANTX100<br>P011B24003    | PCB      | Yageo     | 2.2 dBi      |    | FCC, IC, TELEC<br>KC, NCC, CE<br>SRRC, RCM |
| 4 |  | ANTX100<br>P111B24003    | PCB      | Yageo     | 3.3 dBi      |  | FCC, IC, TELEC<br>KC, NC, SRRC             |

**\* End-product may need to perform further testing when applying CE, RCM and SRRC. Others are modular approval.**

**\* Our certificate(s) might not be applicable when using antenna apart from above list.**

## 8. Reference Circuit



This chapter shows a different combination of reference circuits. **Before getting started, please read below notes carefully because it is applied to all the reference circuits.**

- 32MHz crystal and RF (VDD) DC/DC inductor (Reg1) are already inside the module.
- Module is pre-programmed with Raytac testing code. Default is using LDO mode and need to add external 32.768khz to work.

You can use LDO mode *without* adding external 32.768khz, they are **NOT** related events.

- When using internal 32.768khz RC oscillator, please remove X2 / C12 / C13.
- Recommended L4 spec: 10 $\mu$ H, 0603 Chip Inductor, IDC, min = 80mA,  $\pm 20\%$ .
- When **NOT** using NFC, please remove NFC1 / C19 / C21.


Recommend using when *the highest* input voltage is equal or greater than 3.6V. Supply power from VCC2 (VDDH).

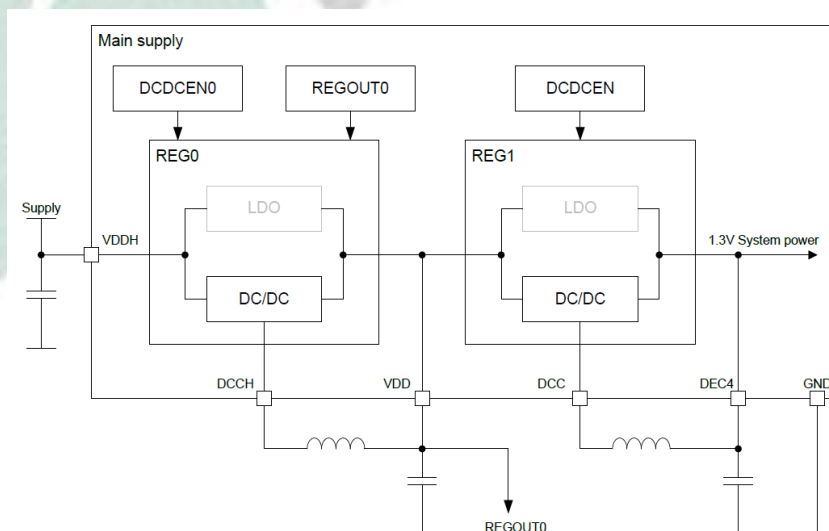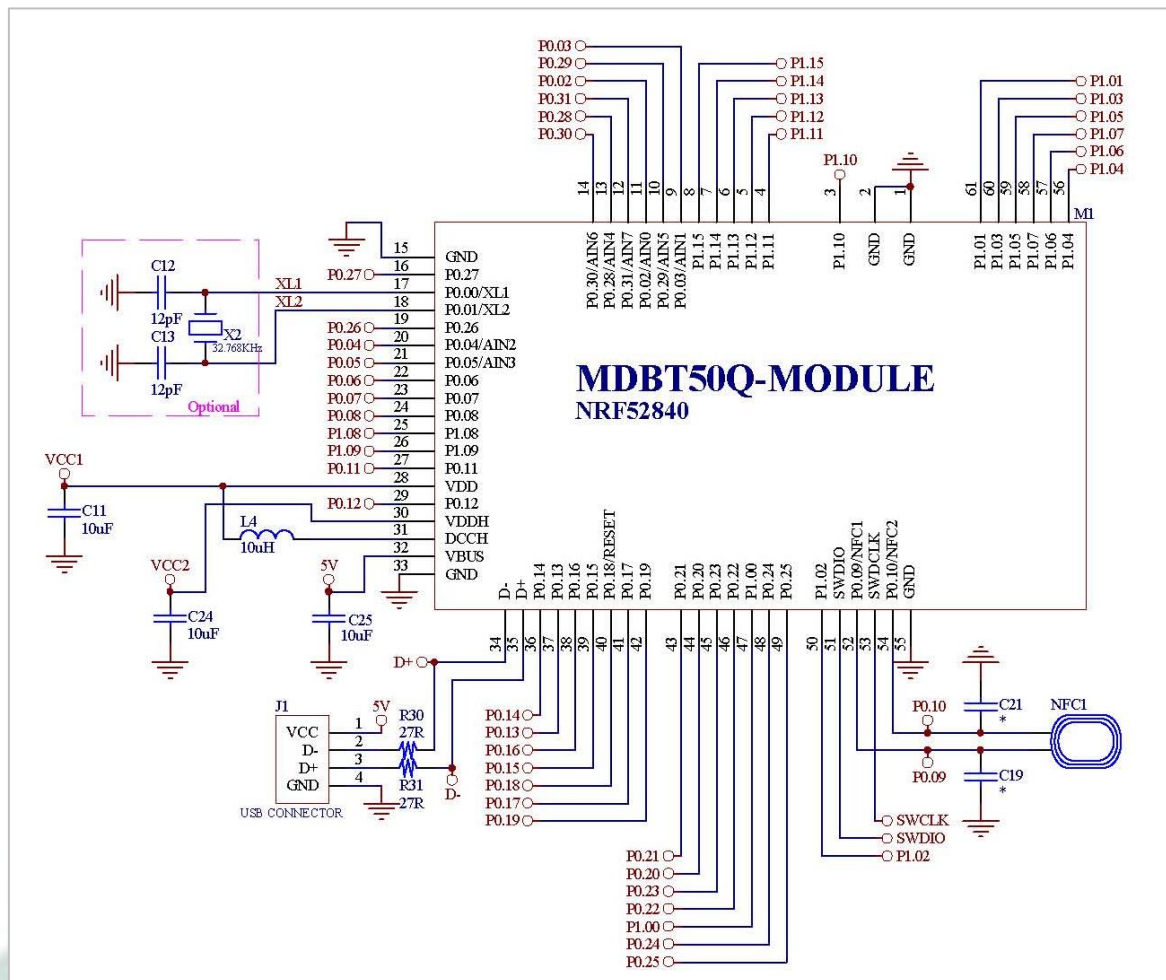

Please check “[Nordic PCN111 Product Change Notification v1.0](#)” for more details about this reference circuit.



## 8.2. Reg0 LDO Mode

Recommend using when *the highest* input voltage is equal or greater than 3.6V. Supply power from VCC2 (VDDH).

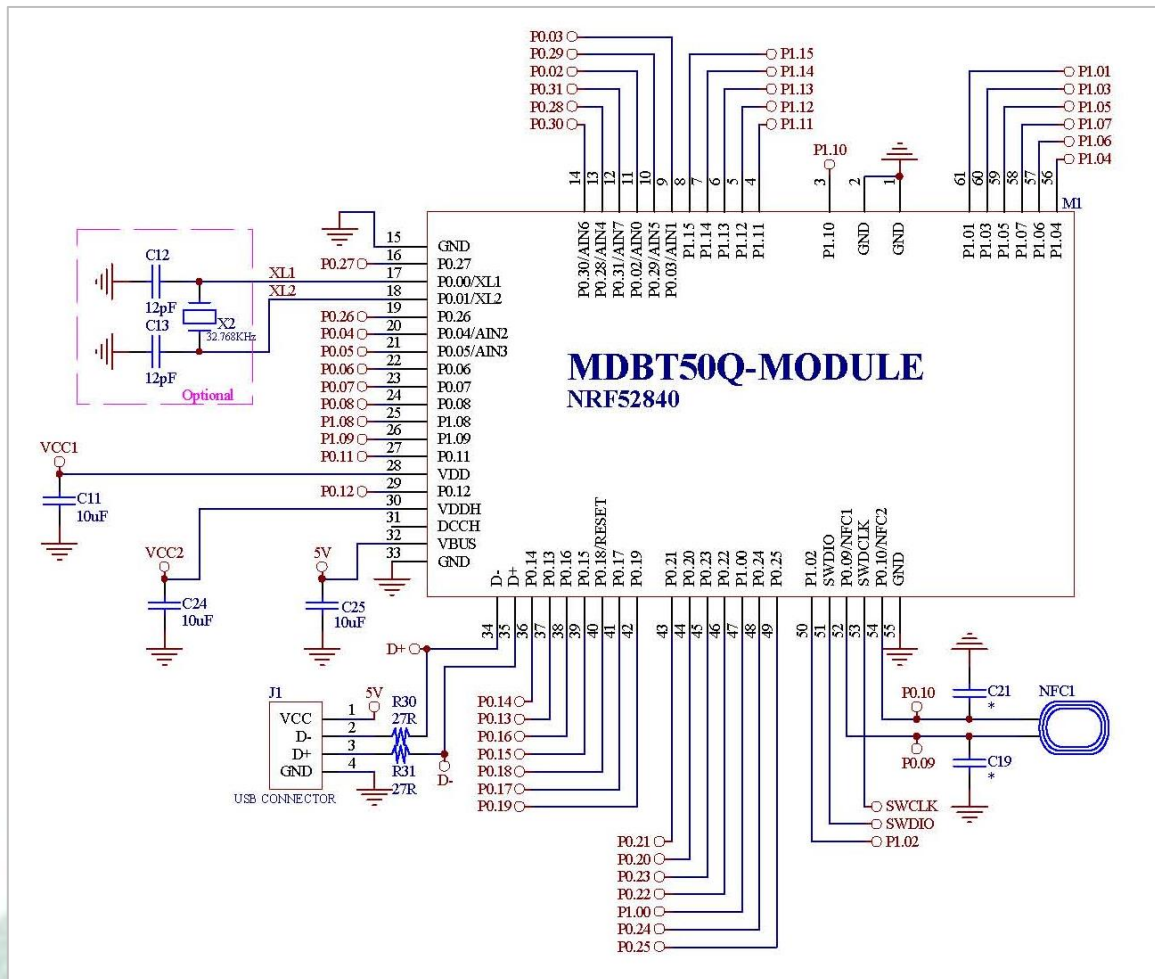

### 8.3. Reg0 DC/DC and LDO Mode Disabled

Recommend using when *the highest* input voltage is less than 3.6V.

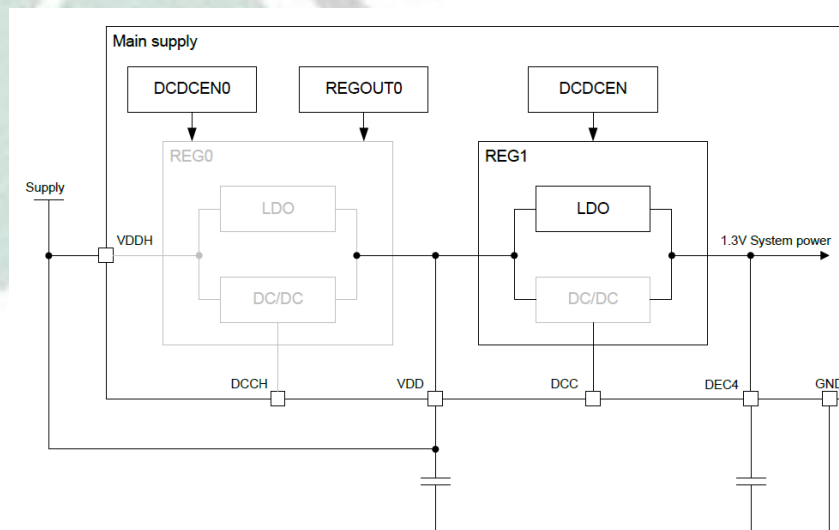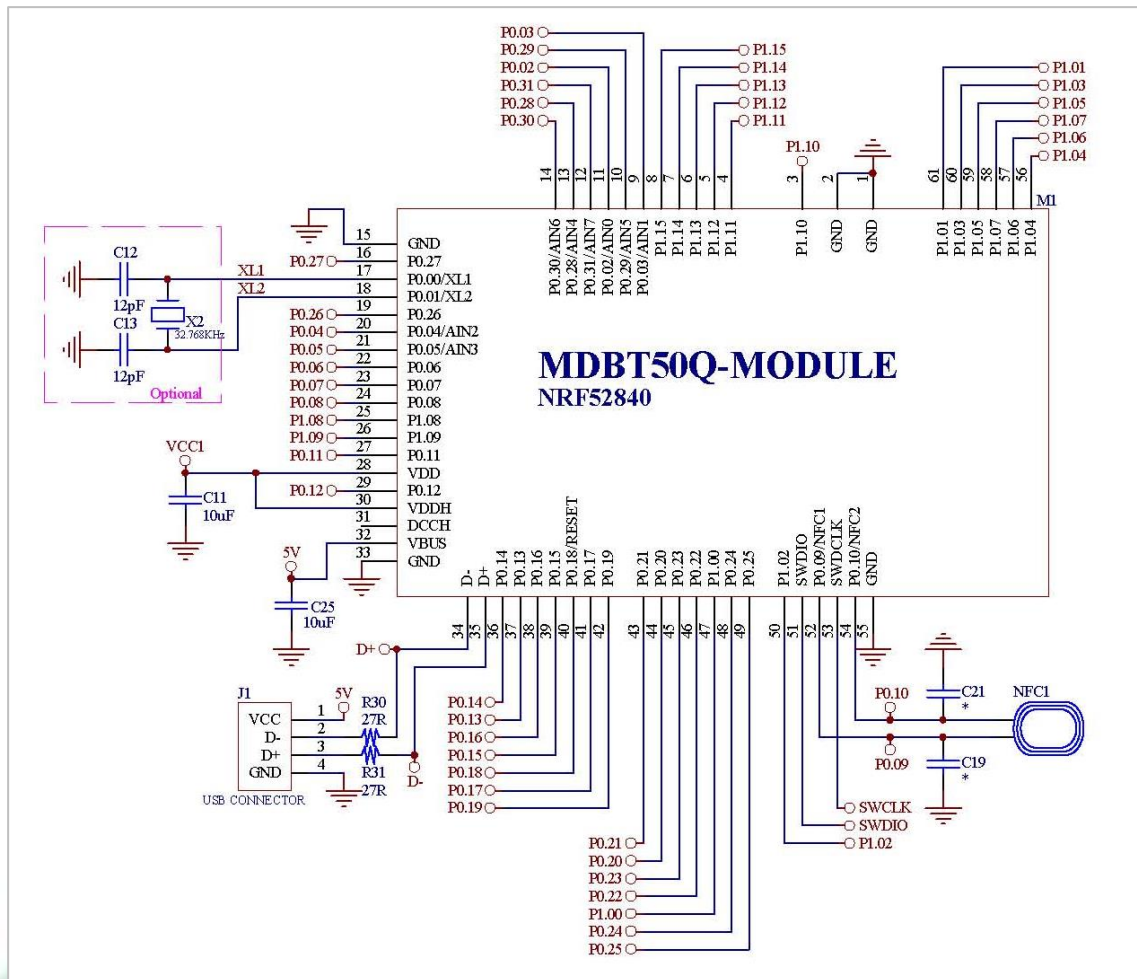



## 9. Certification

### 9.1. Declaration ID

| Declaration ID | QDID(s)              | Company            | Specification Name |
|----------------|----------------------|--------------------|--------------------|
| D047708        | 139361 - End Product | Raytac Corporation | 5.1                |

| Profile Description             | Service Description             |
|---------------------------------|---------------------------------|
| Alert Notification Profile      | Alert Notification Service      |
| Blood Pressure Profile          | Blood Pressure Service          |
|                                 | Device Information Service      |
| Cycling Speed & Cadence Profile | Cycling Speed & Cadence Service |
|                                 | Device Information Service      |
| Glucose Profile                 | Glucose Service                 |
|                                 | Device Information Service      |
| Health Thermometer Profile      | Health Thermometer Service      |
|                                 | Device Information Service      |
| Heart Rate Profile              | Heart Rate Service              |
|                                 | Device Information Service      |
| HID over GATT Profile           | HID Service                     |
|                                 | Battery Service                 |
| Proximity Profile               | Link Loss Service               |
|                                 | Immediate Alert Service         |
|                                 | TX Power Service                |
| Running Speed & Cadence Profile | Running Speed & Cadence Service |
|                                 | Device Information Service      |
| Time Profile                    | Time Profile Service            |
| Glucose Profile (Central)       |                                 |
| Mesh Profile                    | Mesh Provisioning Service       |
|                                 | Mesh Proxy Service              |

## 9.2. FCC Certificate (USA)

**BLE 5.0 and IEEE 802.15.4 approved.**

|                                                                                                                                                                                                                                                                                                                                                                                                       |                                                   |                                                                                      |              |                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|--------------------------------------------------------------------------------------|--------------|-----------------------------------------|
|                                                                                                                                                                                                                                                                                                                     |                                                   |                                                                                      |              |                                         |
| <b>TCB</b>                                                                                                                                                                                                                                                                                                                                                                                            | <b>TCB</b>                                        |                                                                                      |              |                                         |
| <b>GRANT OF EQUIPMENT AUTHORIZATION</b><br>Certification<br>Issued Under the Authority of the<br>Federal Communications Commission<br>By:                                                                                                                                                                                                                                                             |                                                   |                                                                                      |              |                                         |
| Telefication B.V.<br>Edisonstraat 12a<br>Zevenaar, NL-6902 PK<br>Netherlands                                                                                                                                                                                                                                                                                                                          |                                                   |                                                                                      |              |                                         |
| Date of Grant: 07/26/2018<br>Application<br>Dated: 07/25/2018                                                                                                                                                                                                                                                                                                                                         |                                                   |                                                                                      |              |                                         |
| Raytac Corp.<br>5F., No.3, Jiankang Rd., Zhonghe Dist.,<br>New Taipei City,, 23586<br>Taiwan                                                                                                                                                                                                                                                                                                          |                                                   |                                                                                      |              |                                         |
| Attention: Venson Liao , R&D Manager                                                                                                                                                                                                                                                                                                                                                                  |                                                   |                                                                                      |              |                                         |
| <b>NOT TRANSFERABLE</b><br>EQUIPMENT AUTHORIZATION is hereby issued to the named<br>GRANTEE, and is VALID ONLY for the equipment identified hereon for<br>use under the Commission's Rules and Regulations listed below.                                                                                                                                                                              |                                                   |                                                                                      |              |                                         |
| FCC IDENTIFIER:                                                                                                                                                                                                                                                                                                                                                                                       | SH6MDBT50Q                                        |                                                                                      |              |                                         |
| Name of Grantee:                                                                                                                                                                                                                                                                                                                                                                                      | Raytac Corp.                                      |                                                                                      |              |                                         |
| Equipment Class:                                                                                                                                                                                                                                                                                                                                                                                      | Digital Transmission System                       |                                                                                      |              |                                         |
| Notes:                                                                                                                                                                                                                                                                                                                                                                                                | Bluetooth Low Energy & IEEE 802.15.4 Combo Module |                                                                                      |              |                                         |
| Modular Type:                                                                                                                                                                                                                                                                                                                                                                                         | Single Modular                                    |                                                                                      |              |                                         |
| Grant Notes                                                                                                                                                                                                                                                                                                                                                                                           | FCC Rule Parts                                    | Frequency Range (MHZ)                                                                | Output Watts | Frequency Emission Tolerance Designator |
|                                                                                                                                                                                                                                                                                                                                                                                                       | 15C                                               | 2402.0 - 2480.0                                                                      | 0.0066       |                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                       | 15C                                               | 2405.0 - 2480.0                                                                      | 0.0066       |                                         |
| Modular Approval. This is a portable device. Power Output is conducted. This grant is valid only when the module is sold to OEM integrators and must be installed by the OEM or OEM integrators. End-users may not be provided with the module installation instructions. OEM integrators and end-users must be provided with transmitter operating conditions for satisfying RF exposure compliance. |                                                   |                                                                                      |              |                                         |
| Certificate No.:<br>182180940/AA/00                                                                                                                                                                                                                                                                                                                                                                   | Ramy Nabod<br>Product Assessor                    |  |              |                                         |

## 9.3. TELEC Certificate (Japan)

### BLE 5.0

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <i>Certificate Technical Support Center Co., Ltd:</i><br><b>RAB ID No. 018</b>                                                  |
| <b>Construction Type Certification</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                 |
| Registration No.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | CSRT180280-1                                                                                                                    |
| Certificate Holder                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Raytac Corporation<br>5F, No.3, Jiankang Rd., Zhonghe Dist., New Taipei City, 235, Taiwan                                       |
| Product Category                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Article 2, Paragraph 1, Item 19                                                                                                 |
| Model Type or Name                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | MDBT50Q, MDBT50Q-1M, MDBT50Q-P1M, MDBT50Q-U1M,<br>MDBT50Q-P, MDBT50Q-U                                                          |
| Type of Emission, Frequency<br>and Antenna Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | F1D 2402MHz - 2480MHz (2MHz separation, 40 channels)<br>5.9704mW, 5.0816mW                                                      |
| Manufacturer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Raytac Corporation<br>5F, No.3, Jiankang Rd., Zhonghe Dist., New Taipei City, 235, Taiwan                                       |
| Factory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Tech-Lin's Electronics Corp.<br>5F/11F, No. 778, Zhongzheng Rd., Zhonghe Dist., New Taipei City 23586,<br>Taiwan R.O.C          |
| Remarks                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | The scope of evaluation relates to the submitted documents and product only.<br>It is only valid in conjunction with the Annex. |
| <p>When the product is placed on the Japanese market, the Specified Radio Equipment marking as shown on the right must be attached on visible part of the product.</p> <div style="display: flex; align-items: center; justify-content: center;"><div style="text-align: center;"></div><div style="margin-left: 20px;"><div style="border: 1px solid black; padding: 2px 5px;">R</div> 018-180280</div></div> <p>Witnesses that the certification is on Construction Type Certification under Article 38-24 of the Radio Law.</p> <div style="display: flex; justify-content: space-between; align-items: flex-end;"><div><p>Date of Certificate<br/>2018/7/30</p></div><div style="text-align: center;"><br/>_____<br/>Certification Examiner : Takuji Nakano<br/><b>C&amp;S</b> Certificate Technical Support Center Co., Ltd.</div><div style="text-align: center;"></div></div> <div style="text-align: center; margin-top: 10px;"><p>Address: 610- 1 Kishine-cho, Kohoku-ku, Yokohama-City, 222-0034 Japan<br/>Tel.: +81 45 594 9185 • Fax: +81 45 594 9183 • E-mail: cert@cns-web.co.jp</p></div> |                                                                                                                                 |

## IEEE 802.15.4



Certificate Technical Support Center Co., Ltd.  
RAB ID No. 018

### Construction Type Certification

Registration No. CSRT180280-1

Certificate Holder Raytac Corporation  
5F, No.3, Jiankang Rd., Zhonghe Dist., New Taipei City, 235, Taiwan

Product Category Article 2, Paragraph 1, Item 19

Model Type or Name MDBT50Q, MDBT50Q-1M, MDBT50Q-P1M, MDBT50Q-U1M,  
MDBT50Q-P, MDBT50Q-U

Type of Emission, Frequency and Antenna Power G1D 2405MHz - 2480MHz (5MHz separation, 16 channels)  
3.539mW/MHz

Manufacturer Raytac Corporation  
5F, No.3, Jiankang Rd., Zhonghe Dist., New Taipei City, 235, Taiwan

Factory Tech-Lin's Electronics Corp.  
5F/11F, No. 778, Zhongzheng Rd., Zhonghe Dist., New Taipei City 23586,  
Taiwan R.O.C

Remarks The scope of evaluation relates to the submitted documents and product only.  
It is only valid in conjunction with the Annex.

When the product is placed on the Japanese market, the Specified Radio Equipment marking as shown on the right must be attached on visible part of the product.



R 018-180280

Witnesses that the certification is on Construction Type Certification under Article 38-24 of the Radio Law.

Date of Certificate  
2018/7/30

*Takuji Nakano*

Certification Examiner : Takuji Nakano  
C&S Certificate Technical Support Center Co., Ltd.




Address: 610-1 Kishine-cho, Kohoku-ku, Yokohama-City, 222-0034 Japan  
Tel.: +81 45 594 9185 • Fax: +81 45 594 9183 • E-mail: cert@cns-web.co.jp

## 9.4. NCC Certificate (Taiwan)

*BLE 5.0 and IEEE 802.15.4 approved.*

### MDBT50Q-U

|                                                                                                                                                                                                      |                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                                                                                                     | <b>台灣檢驗科技股份有限公司</b><br><b>電信管制射頻器材型式認證證明</b>                                        |
| 一、申請者：勁達國際電子有限公司                                                                                                                                                                                     |                                                                                     |
| 二、地址：臺北市大安區和平東路1段145號5樓之1                                                                                                                                                                            |                                                                                     |
| 三、製造廠商：勁達國際電子有限公司                                                                                                                                                                                    |                                                                                     |
| 四、器材名稱：低功耗藍牙及 IEEE 802.15.4 整合模組                                                                                                                                                                     |                                                                                     |
| 五、廠牌：Raytac                                                                                                                                                                                          |                                                                                     |
| 六、型號：MDBT50Q-U                                                                                                                                                                                       |                                                                                     |
| 七、發射功率(電場強度)：詳細射頻規格如備註欄                                                                                                                                                                              |                                                                                     |
| 八、工作頻率：詳細射頻規格如備註欄                                                                                                                                                                                    |                                                                                     |
| 九、審驗日期：108年10月24日                                                                                                                                                                                    |                                                                                     |
| 十、審驗合格標籤式樣：                                                                                                                                                                                          |  |
| 十一、警語或標示要求：(器材本體、使用手冊、外包裝盒等應遵守下列標示要求)                                                                                                                                                                |                                                                                     |
| 1. 應依審驗合格標籤或符合性聲明標籤式樣自製標籤黏貼或印鑄於電信管制射頻器材本體明顯處，並於包裝盒標示本會標章，始得開陳列或販賣。                                                                                                                                   |                                                                                     |
| 2. 電信管制射頻器材應依本會或相關技術規範規定於指定位置標示中文警語。                                                                                                                                                                 |                                                                                     |
| 3. 經授權使用射頻模組(組件)之審驗合格標籤者，應於最終產品說明書及包裝盒提供充分與正確之資訊。                                                                                                                                                    |                                                                                     |
| 4. 於網際網路販賣取得審驗證明之電信管制射頻器材者，應於該網際網路網頁提供審驗合格標籤或符合性聲明標籤資訊。                                                                                                                                              |                                                                                     |
| 5. 使用手冊應標示下列資訊：<br>(1)經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。 |                                                                                     |
| 6. 本器材之審驗範圍僅限無線射頻硬體功能，不及於器材之資通安全檢測。                                                                                                                                                                  |                                                                                     |

型式認證號碼：CCAM18LP0825T4      第 1 頁，共 2 頁      本證書與續頁分開使用無效

## 9.5. CE (EU) & RCM (Australia & New Zealand) Test Report

### BLE 5.0

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                  |                                                                                                                                                                                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                  | Report No.: E2/2018/50088-01<br>Page: 1 of 71                                                                                                                                                            |
| <p style="text-align: center;"><b>RED (2014/53/EU) ETSI EN 300 328 V2.1.1: 2016<br/>&amp;<br/>Australian/New Zealand Standard AS/NZS 4268:2017<br/>TEST REPORT</b></p> <hr/>                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                  |                                                                                                                                                                                                          |
| <b>FOR</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                  |                                                                                                                                                                                                          |
| <b>Applicant:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Raytac Corporation<br>5F, No.3, Jiankang Rd., Zhonghe Dist., New Taipei City, 235,<br>Taiwan                     |                                                                                                                                                                                                          |
| <b>Product Name:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Bluetooth Low Energy & IEEE 802.15.4 Combo Module                                                                |                                                                                                                                                                                                          |
| <b>Brand Name:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Raytac                                                                                                           |                                                                                                                                                                                                          |
| <b>Model No.:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | MDBT50Q, MDBT50Q-P, MDBT50Q-U                                                                                    |                                                                                                                                                                                                          |
| <b>Model Difference:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Different Antenna Type                                                                                           |                                                                                                                                                                                                          |
| <b>Report Number:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | E2/2018/5088-01                                                                                                  |                                                                                                                                                                                                          |
| <b>Issue Date:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Oct. 14, 2019                                                                                                    |                                                                                                                                                                                                          |
| <b>Date of Test:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | May 31, 2018 ~ Jun. 28, 2018                                                                                     |                                                                                                                                                                                                          |
| <b>Date of EUT Received:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | May 31, 2018                                                                                                     |                                                                                                                                                                                                          |
| <p><b>We hereby certify that:</b><br/>The above equipment was tested by SGS Taiwan Ltd., Electronics &amp; Communication Laboratory for compliance with the requirements set forth in the European Standard ETSI EN 300 328 V2.1.1: 2016 under RED 2014/53/EU and Australian/New Zealand Standard AS/NZS 4268:2017, Row 59. Test report to determine compliance with AS/NZS 4268 requirements. The results of testing in this report apply to the product system that was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.</p> |                                                                                                                  |                                                                                                                                                                                                          |
| <b>Approved By:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <br><hr/> Jim Chang / Manager |  <br>Testing Laboratory<br>0513 |

## IEEE 802.15.4



Report No.: E2/2018/50089-01  
Page: 1 of 56

### RED (2014/53/EU) ETSI EN 300 328 V2.1.1: 2016 & Australian/New Zealand Standard AS/NZS 4268:2017 TEST REPORT

#### FOR

**Applicant:** Raytac Corporation  
5F, No.3, Jiankang Rd., Zhonghe Dist., New Taipei City, 235,  
Taiwan  
**Product Name:** Bluetooth Low Energy & IEEE 802.15.4 Combo Module  
**Brand Name:** Raytac  
**Model No.:** MDBT50Q, MDBT50Q-P, MDBT50Q-U  
**Model Difference:** Different Antenna Type  
**Report Number:** E2/2018/50089-01  
**Issue Date:** Oct. 14, 2019  
**Date of Test:** May 31, 2018 ~ Jul. 23, 2018  
**Date of EUT Received:** May 31, 2018

**We hereby certify that:**

The above equipment was tested by SGS Taiwan Ltd., Electronics & Communication Laboratory for compliance with the requirements set forth in the European Standard ETSI EN 300 328 V2.1.1: 2016 under RED 2014/53/EU and Australian/New Zealand Standard AS/NZS 4268:2017. Test report to determine compliance with AS/NZS 4268 requirements. The results of testing in this report apply to the product system that was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved By: \_\_\_\_\_

*Jim Chang*  
Jim Chang / Manager





SGS Reference No: MH/2018/60113C-01

## VERIFICATION OF EMC COMPLIANCE

Verification No. : MH/2018/60113C-01  
Representative Model No. : MDBT50Q  
Added Model(s) : MDBT50Q-P, MDBT50Q-U  
Product Name : Bluetooth Low Energy & IEEE 802.15.4 Combo Module  
Brand Name : Raytac  
Applicant : Raytac Corporation  
Address of Applicant : 5F, No.3, Jiankang Rd., Zhonghe Dist., New Taipei City, 235, Taiwan  
Test Report Number : MH/2018/60113-01  
Date of Issue : Oct. 02, 2019  
Applicable Standards : EN 301 489 -1 v2.2.0 : 2017-03 (Draft)  
EN 301 489 -17 v3.2.0 : 2017-03 (Draft)  
EN 55032 : 2015+AC:2016-07  
EN 61000-4-2 : 2009, EN 61000-4-3 : 2006+A1:2008+A2:2010

### Conclusion

Please be noted that the VERIFICATION MH/2018/60113C-01 will replace the previous MH/2018/60113C as the new version. Also be pay attention that MH/2018/60113C is ineffective anymore from now on.

The apparatus meets the requirements of the above standards and hence compliance the essential requirements under article 3.1b of the RED (2014/53/EU) Directive.

\*This verification is only valid for the equipment and configuration described, and in conjunction with the test report as detailed above.

Authorized Signatory:

SGS TAIWAN LTD.  
Eddy Cheng  
Technical Asst. Supervisor

## 9.6. IC Certificate (Canada)

**BLE 5.0 and IEEE 802.15.4 approved.**

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| <b>telefication bv</b><br>The Netherlands<br>Chamber of Commerce<br>51565536<br>www.telefication.com                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                      |  <b>telefication</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                            |
| <b>TECHNICAL ACCEPTANCE<br/>CERTIFICATE</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                      | <b>CERTIFICAT D'ACCEPTABILITÉ<br/>TECHNIQUE</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                            |
| CERTIFICATION No.<br>No. DE CERTIFICATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 8017A-MDBT50QU                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                            |
| TELEFICATION No.<br>No. DE TELEFICATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 192170354/AA/00                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                            |
| TEST SITE No.<br>No. DE LABORATOIRE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 4620A-5                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                            |
| ISSUED TO<br>DELIVRÉ À                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Raytac Corporation                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                            |
| TYPE OF EQUIPMENT<br>GENRE DE MATÉRIEL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Bluetooth device<br>Spread Spectrum/Digital Device (2400-2483.5 MHz) |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                            |
| TRADE NAME AND MODEL<br>MARQUE ET MODELE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Raytac / MDBT50Q-U1M<br>Raytac / MDBT50Q-U                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                            |
| CERTIFIED TO<br>CERTIFIÉ SELON LE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | SPECIFICATION<br>CAHIER DES CHARGES                                  | RSS-102<br>RSS-247                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ISSUE<br>EDITION<br>5<br>2 |
| <p>Certification of equipment means only that the equipment has met the requirements of the above-noted specification. Licence applications, where applicable to use certified equipment, are acted on accordingly by the ISDE issuing office and will depend on the existing radio environment, service and location of operation. This certificate is issued on condition that the holder complies and will continue to comply with the requirements and procedures issued by ISDE. The equipment for which this certificate is issued shall not be manufactured, imported, distributed, leased, offered for sale or sold unless the equipment complies with the applicable technical specifications and procedures issued by ISDE.</p> |                                                                      | <p>La certification du matériel signifie seulement que le matériel a satisfait aux exigences de la norme indiquée ci-dessus. Les demandes de licences nécessaires pour l'utilisation du matériel certifié sont traitées en conséquence par le bureau de délivrance d'ISDE et dépendent des conditions radio ambiantes, du service et de l'emplacement d'exploitation. Le présent certificat est délivré à la condition que le titulaire satisfasse et continue de satisfaire aux exigences et aux procédures d'ISDE. Le matériel à l'égard duquel le présent certificat est délivré ne doit pas être fabriqué, importé, distribué, loué, mis en vente ou vendu à moins d'être conforme aux procédures et aux spécifications techniques applicables publiées par ISDE.</p> |                            |
| ISSUED BY TELEFICATION BV (NL0001), RECOGNIZED CERTIFICATION BODY BY INNOVATION, SCIENCE AND ECONOMIC DEVELOPMENT CANADA<br>DELIVRÉ PAR TELEFICATION BV (NL0001), ORGANISME DE CERTIFICATION RECONNU PAR INNOVATION, SCIENCES ET DÉVELOPPEMENT ÉCONOMIQUE CANADA                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                            |
| <i>I hereby attest that the subject equipment was tested and found in compliance with the above-noted specification.<br/>         J'atteste, par la présente, que le matériel a fait l'objet d'essai et a été jugé conforme à la spécification ci-dessus</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                            |
| DATE 25 Oct 2019 BY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Gürhan Vural<br>Product Assessor                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                            |
| This certificate has one annex.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                            |

## 9.7. SRRC Certificate (China)

*BLE 5.0 and IEEE 802.15.4 approved.*



## 9.8. KC Certificate (South Korea)

**BLE 5.0 and IEEE 802.15.4 approved.**

2CC6-E6D4-B6AA-9E64

| <b>방송통신기자재등의 적합인증서</b><br><i>Certificate of Broadcasting and Communication Equipments</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|
| 상호 또는 성명<br><i>Trade Name or Applicant</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Raytac Corporation           |
| 기자재명칭(명칭)<br><i>Equipment Name</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 특정소출력 무선기기(무선데이터통신시스템용 무선기기) |
| 기본모델명<br><i>Basic Model Number</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | MDBT50Q-U                    |
| 파생모델명<br><i>Series Model Number</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | MDBT50Q, MDBT50Q-P           |
| 인증번호<br><i>Certification No.</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | R-C-ryt-MDBT50Q              |
| 제조사/제조국가<br><i>Manufacturer/<br/>Country of Origin</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Raytac Corporation / 대만      |
| 인증연월일<br><i>Date of Certification</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 2018-08-17                   |
| 기타<br><i>Others</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                              |
| <p>위 기자재는 「전파법」 제58조의2 제2항에 따라 인증되었음을 증명합니다.</p> <p>It is verified that foregoing equipment has been certificated under the Clause 2, Article 58-2 of Radio Waves Act.</p> <p style="text-align: right;">2018년(Year) 08월(Month) 17일(Day)</p> <p style="text-align: center;">국립전파연구원장</p> <p style="text-align: center;">  </p> <p style="text-align: center;"><i>Director General of National Radio Research Agency</i></p> <p style="text-align: center;">※ 인증 받은 방송통신기자재는 반드시 "적합성평가표시" 를 부착하여 유통하여야 합니다.<br/>위반시 과태료 처분 및 인증이 취소될 수 있습니다.</p> |                              |

## 9.9. WPC (ETA) Certificate (India)

**BLE 5.0 and IEEE 802.15.4 approved.**

|                                                                                                                                                                                                                                                                              |                                                                                                                                                                           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br>Government of India<br>Ministry of Communications & IT<br>Department of Telecommunications, Wireless Planning and Coordination Wing<br>RLO SR, IMS CAMPUS, PERUNGUDI, CHENNAI - 600 096 |                                                                                        |
| FileNo. J-22022/01/2017-RLO(SR)/6477                                                                                                                                                                                                                                         | Date 22-10-2018                                                                                                                                                           |
| <b>ETA Certificate No: ETA - 1324/2017-RLO(SR) On-Line ID 2018118032</b>                                                                                                                                                                                                     |                                                                                                                                                                           |
| Equipment Type Approval is hereby granted for under mentioned equipment for operation with following parameters/conditions:                                                                                                                                                  |                                                                                                                                                                           |
| <b>I. Details of Applicant and parameters of Equipment:</b>                                                                                                                                                                                                                  |                                                                                                                                                                           |
| 1. Name and address of the Applicant                                                                                                                                                                                                                                         | Atoll Solutions Private Limited<br>#229, 2nd Floor, 2A Main, 5th Cross New Thippasandra, Bangalore-560075                                                                 |
| 2. Equipment                                                                                                                                                                                                                                                                 | Bluetooth Low Energy & IEEE 802.15.4 Combo Module                                                                                                                         |
| 3. Model No.                                                                                                                                                                                                                                                                 | MDBT50Q-U1M                                                                                                                                                               |
| 4. Manufactured by                                                                                                                                                                                                                                                           | Raytac Corporation<br>5F No.3 Jiankang Rd. Zhonghe Dist., New Taipei City, 235, Taiwan.                                                                                   |
| 5. Frequency Range (MHz)                                                                                                                                                                                                                                                     | 2402 - 2480 MHz                                                                                                                                                           |
| 6. Max. Output Power                                                                                                                                                                                                                                                         | 8.19 dBm                                                                                                                                                                  |
| 7. Modulation                                                                                                                                                                                                                                                                | O-QPSK, GFSK.                                                                                                                                                             |
| 8. Remarks                                                                                                                                                                                                                                                                   | This ETA is for RF Module available in the above equipment operating in above frequency band. This is not Import license, seperate import license is required for Import. |

## 9.10. RoHS & REACH Report

Please visit "[Support](#)" page of our website to download.

## 9.11. End-Product Label

It is suggested using following content adding to package or user manual or label to obey the regulation. Any rules of end-product label shall refer to each certification for final reference.

### 9.11.1. FCC (USA)

The FCC statement should be included in the user manual when there is no enough space on label. Otherwise, it should be included on the label.

“This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions. (1) This device may not cause harmful interference. (2) This device must accept any interference received, including interference that may cause undesired operation.”

The final end product must be labeled in a visible area with the following: “Contain FCC ID: SH6MDBT50Q”.

### 9.11.2. TELEC (Japan)

When manufacturer is placing the product on the Japanese market, the product must be affixed with the following Specified Radio Equipment marking:



### 9.11.3. NCC (Taiwan)

請依下列標籤式樣自製標籤，標貼或印鑄於器材本體明顯處，始得販賣或公開陳列。

MDBT50Q-U Series



平台廠商必須於平台上標示字樣「本產品內含射頻模組：ID 編號 CCAM18LP0825T4」。

「平台」定義如下：若器材組裝本案模組，消費者仍能正常使用該器材主要功能，該器材得視為平台。若器材不組裝本案模組，消費者不能正常使用該器材主要功能，該器材不能視為平台。該類不同廠牌型號器材組裝本案審驗模組後，須分別申請型式認證。

### 9.11.4. IC (Canada)

The IC statement should be included in the user manual when there is no enough space on label. Otherwise, it should be included on the label.

“This device complies with Industry Canada license-exempt RSS Standard(s). Operation is subject to the following two conditions. (1) This device may not cause harmful interference. (2) This device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.”

The final end product must be labeled in a visible area with the following: “Contain IC ID: 8017A-MDBT50QU”.

## 10. Notes and Cautions

Module is not designed to last for a lifetime. Like general products, it is expected to be worn out after continuous usage through the years. To assure that product will perform better and last longer, please make sure you:

- Follow the guidelines of this document while designing circuit/end-product. Any discrepancy of core Bluetooth technology and technical specification of IC should refer to definition of Bluetooth Organization and Nordic Semiconductor as final reference.
- Do not supply voltage that is not within range of specification.
- Eliminate static electricity at any cost when working with the module as it may cause damage. It is highly recommended adding anti-ESD components to circuit design to prevent damage from real-life ESD events. Anti-ESD methods can be also applied in mechanical design.
- Do not expose modules under direct sunlight for long duration. Modules should be kept away from humid and salty air conditions, and any corrosive gasses or substances. Store it within -40°C to +125°C before and after installation.
- Avoid any physical shock, intense stress to the module or its surface.
- Do not wash the module. No-Clean Paste is used in production. Washing it will oxidize the metal shield and have chemistry reaction with No-Clean Paste. Functions of the module are not guaranteed if it has been washed.

The module is not suitable for life support device or system and not allowed to be used in destructive device or systems in any direct or indirect ways. The customer agrees to indemnify Raytac for any losses when applying modules in applications such as the ones described above.

# 11. Basic Facts for nRF52 Family

Below chart shows basic spec for Nordic nRF52 family, which is helpful to understand the differences between each SoC. Any discrepancy shall refer to Nordic's technical document as final reference.

| Nordic Solution                  | nRF52840                                       | nRF52833                                       | nRF52832                                                             | nRF52810                          | nRF52811                        |
|----------------------------------|------------------------------------------------|------------------------------------------------|----------------------------------------------------------------------|-----------------------------------|---------------------------------|
| RAYTAC Model No.                 | MDBT50Q-1MV2<br>MDBT50Q-P1MV2<br>MDBT50Q-U1MV2 | MDBT50Q-512K<br>MDBT50Q-P512K<br>MDBT50Q-U512K | MDBT42Q-512KV2<br>MDBT42Q-P512KV2<br>MDBT42 series<br>MDBT42V series | MDBT42Q-192KV2<br>MDBT42Q-P192KV2 | MDBT42Q-192KL<br>MDBT42Q-P192KL |
| Bluetooth 5.1                    |                                                | V                                              |                                                                      |                                   | V                               |
| Bluetooth 5 Long Range (125kbps) | V                                              | V                                              |                                                                      |                                   | V                               |
| Bluetooth 5 High Speed           | V                                              | V                                              | V                                                                    | V                                 | V                               |
| Bluetooth 5 Ad. Extention (x8)   | V                                              | V                                              | V                                                                    | V                                 | V                               |
| Flash (kBytes)                   | 1024                                           | 512                                            | 512                                                                  | 192                               | 192                             |
| RAM (kBytes)                     | 256                                            | 128                                            | 64                                                                   | 24                                | 24                              |
| ANT Plus                         | V                                              | V                                              | V                                                                    | V                                 | V                               |
| IEEE 802.15.4                    | V                                              | V                                              |                                                                      |                                   | V                               |
| ARM® TrustZone® Cryptocell       | V                                              |                                                |                                                                      |                                   |                                 |
| USB                              | V                                              | V                                              |                                                                      |                                   |                                 |
| QSPI                             | V                                              |                                                |                                                                      |                                   |                                 |
| NFC                              | V                                              | V                                              | V                                                                    |                                   |                                 |
| I2S                              | V                                              | V                                              | V                                                                    |                                   |                                 |
| SPI, TWI, UART, PWM              | V                                              | V                                              | V                                                                    | V                                 | V                               |
| PDM                              | V                                              | V                                              | V                                                                    | V                                 | V                               |
| ADC, Comparators                 | V                                              | V                                              | V                                                                    | V                                 | V                               |
| Supply Range (V)                 | 1.7 to 5.5                                     | 1.7 to 5.5                                     | 1.7 to 3.6                                                           | 1.7 to 3.6                        | 1.7 to 3.6                      |

## 12. Useful Links

- **Nordic Infocenter:** <https://infocenter.nordicsemi.com/index.jsp>  
All the necessary technical files and software development kits of Nordic's chip are on this website.
- **Nordic DevZone:** <https://devzone.nordicsemi.com/questions/>  
A highly recommended website for firmware developer. Interact, discuss and consult with other fellow developers and Nordic's employees to get answers to your questions. The site also includes tutorials in detail to help you get started.
- **Official Page of nRF52840 :** <https://www.nordicsemi.com/eng/Products/nRF52840>  
A brief introduction to nRF52840 and download links for Nordic's developing software and SoftDevices.

# Full List of Raytac's BLE Modules

## Raytac Corporation Bluetooth Module Family

Solution by  
**NORDIC**  
SEMICONDUCTOR



### MDBT40 & MDBT40-P Series

| Series            | Nordic Solution | Raytac No.         | IC Version | Antenna      | RAM   | Flash Memory |
|-------------------|-----------------|--------------------|------------|--------------|-------|--------------|
| MDBT40            | nRF51822        | MDBT40-256V3       | 3          | Chip Antenna | 16 kb | 256 K        |
|                   |                 | MDBT40-256RV3      |            |              | 32 kb | 256 K        |
| MDBT40-P          | nRF51822        | MDBT40-P256V3      | 3          | PCB Antenna  | 16 kb | 256 K        |
|                   |                 | MDBT40-P256RV3     |            |              | 32 kb | 256 K        |
| MDBT40 - ANT      | nRF51422        | MDBT40-ANT-256V3   | 3          | Chip Antenna | 16 kb | 256 K        |
|                   |                 | MDBT40-ANT-256RV3  |            |              | 32 kb |              |
| MDBT40 - ANT-P    | nRF51422        | MDBT40-ANT-P256V3  | 3          | PCB Antenna  | 16 kb | 256 K        |
|                   |                 | MDBT40-ANT-P256RV3 |            |              | 32 kb |              |
| MDBT40 Nano       | nRF51822        | MDBT40-n256V3      | 3          | N/A          | 16 kb | 256 K        |
| MDBT40 - ANT-Nano | nRF51422        | MDBT40-ANT-n256V3  | 3          | N/A          | 16 kb | 256 K        |

### *MDBT42Q Series (QFN Package IC)*

| Series  | Nordic Solution | Raytac No.     | IC Version | Antenna      | RAM   | Flash Memory |
|---------|-----------------|----------------|------------|--------------|-------|--------------|
| MDBT42Q | nRF52832        | MDBT42Q-512KV2 | 2          | Chip Antenna | 64 kb | 512 K        |
|         | nRF52810        | MDBT42Q-192K   | 1          |              | 24 kb | 192 K        |
|         | nRF52811        | MDBT42Q-192KL  | 1          |              |       |              |

|           |          |                 |   |             |       |       |
|-----------|----------|-----------------|---|-------------|-------|-------|
| MDBT42Q-P | nRF52832 | MDBT42Q-P512KV2 | 2 | PCB Antenna | 64 kb | 512 K |
|           | nRF52810 | MDBT42Q-P192K   | 1 |             | 24 kb | 192 K |
|           | nRF52811 | MDBT42Q-P192KL  | 1 |             |       |       |

|           |          |                 |   |                |       |       |
|-----------|----------|-----------------|---|----------------|-------|-------|
| MDBT42Q-U | nRF52832 | MDBT42Q-U512KV2 | 2 | u.FL Connector | 64 kb | 512 K |
|-----------|----------|-----------------|---|----------------|-------|-------|

### *MDBT42 Series (WLCSP Package IC)*

| Series   | Nordic Solution | Raytac No.     | IC Version | Antenna      | RAM   | Flash Memory |
|----------|-----------------|----------------|------------|--------------|-------|--------------|
| MDBT42   | nRF52832        | MDBT42-512KV2  | 2          | Chip Antenna | 64 kb | 512 K        |
| MDBT42-P |                 | MDBT42-P512KV2 |            | PCB Antenna  |       |              |

| Series    | Nordic Solution | Raytac No.      | IC Version | Antenna      | RAM   | Flash Memory |
|-----------|-----------------|-----------------|------------|--------------|-------|--------------|
| MDBT42V   | nRF52832        | MDBT42V-512KV2  | 2          | Chip Antenna | 64 kb | 512 K        |
| MDBT42V-P |                 | MDBT42V-P512KV2 |            | PCB Antenna  |       |              |

### *MDBT50Q Series (aQFN Package IC)*

| Series    | Nordic Solution | Raytac No.    | IC Version | Antenna        | RAM    | Flash Memory |
|-----------|-----------------|---------------|------------|----------------|--------|--------------|
| MDBT50Q   | nRF52840        | MDBT50Q-1MV2  | 2          | Chip Antenna   | 256 kb | 1MB          |
|           | nRF52833        | MDBT50Q-512K  | 1          |                | 128 kb | 512 kb       |
| MDBT50Q-P | nRF52840        | MDBT50Q-P1MV2 | 2          | PCB Antenna    | 256 kb | 1MB          |
|           | nRF52833        | MDBT50Q-P512K | 1          |                | 128 kb | 512 kb       |
| MDBT50Q-U | nRF52840        | MDBT50Q-U1MV2 | 2          | u.FL Connector | 256 kb | 1MB          |
|           | nRF52833        | MDBT50Q-U512K | 1          |                | 128 kb | 512 kb       |

|        |          |            |      |             |        |     |
|--------|----------|------------|------|-------------|--------|-----|
| Dongle | nRF52840 | MDBT50Q-RX | 1, 2 | PCB Antenna | 256 kb | 1MB |
|--------|----------|------------|------|-------------|--------|-----|

# Release Note

- 2018/06/26: Version A (1<sup>st</sup> release)
- 2018/09/21 Version B
  - (1) Added link of design guide in Chapter 2
  - (2) Updated photo of module in Chapter 4 and added marking and tray info.
  - (3) Updated schematic in Chapter 8 for easier understanding.
  - (4) Updated Declaration ID & regional certification info in Chapter 9.
  - (5) Added “No-Wash” warning in Chapter 10.
- 2018/11/01 Version C
  - (1) Updated drawing in Chapter 2 for a better understanding of PCB measurement.
  - (2) Updated Chapter 4 with new label info.
  - (3) Added WPC (ETA) certificate in Chapter 9: Certification.
- 2019/05/03 Version D
  - (1) Updated model no. to MDBT50Q-U1MV2 due to upgrade of revision 2 SoC.
  - (2) Updated Chapter 4: Shipment Packaging Info with new module photo, model no. and added tape & reel info.
  - (3) Updated Chapter 5: Specification corresponding to Nordic’s new nRF52840 Product Specification v1.1.
  - (4) Added nRF52811 in Chapter 11: Basic Facts for nRF52 Chips and Full List of Raytac’s BLE Modules.
  - (5) Refine description in Chapter 2.3: RF Layout Suggestion and added range performance on the first page.
- 2019/08/06 Version E
  - (1) Added tolerance of PCB size in Chapter 2: Product Dimension.
  - (2) Corrected label info in Chapter 4: Shipment Packaging Information.
- 2019/11/06 Version F
  - (1) Added wireless range under radio data rate of 125kbps on front page.
  - (2) Refined descriptions of layout suggestion in Chapter 2: Product Dimension.
  - (3) Updated certification information and added section 11 in Chapter 9: Certification.
  - (4) Added nRF52833 to the chart in Chapter 11: Basic Facts of nRF52 Family & Full List of Raytac ‘s BLE Modules.

- 2020/03/05 Version G

- (1) Corrected description of SWDIO & SWCLK in section 5 and added remarks about low frequency GPIO in section 6 of Chapter 2.
- (2) Refined description of default setting in Chapter 8.

